

**Features**

- Double quarter-turn ceramic disc valves ensure reliable on/off operation.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Articulating spout with 360-degree rotation offers superior clearance for filling pots on cooktops and ranges.
- Single lever handle with main lever shutoff. • 22" (559 mm) extended swing spout reach.
- 6.7 gal/min (25.4 l/min) at 60 psi (4.1 bar),
- Coordinates with other HiRise kitchen products.

**Material**

- Stainless Steel construction.
- KOHLER finishes resist corrosion and tarnishing.

**Installation**

- Deck-Mount Installation

**Codes/Standards**

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

**KOHLER® Faucet Lifetime Limited Warranty**

See website for detailed warranty information.


**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color    Code    Description**

S    Polished Stainless

BS    Brushed Stainless

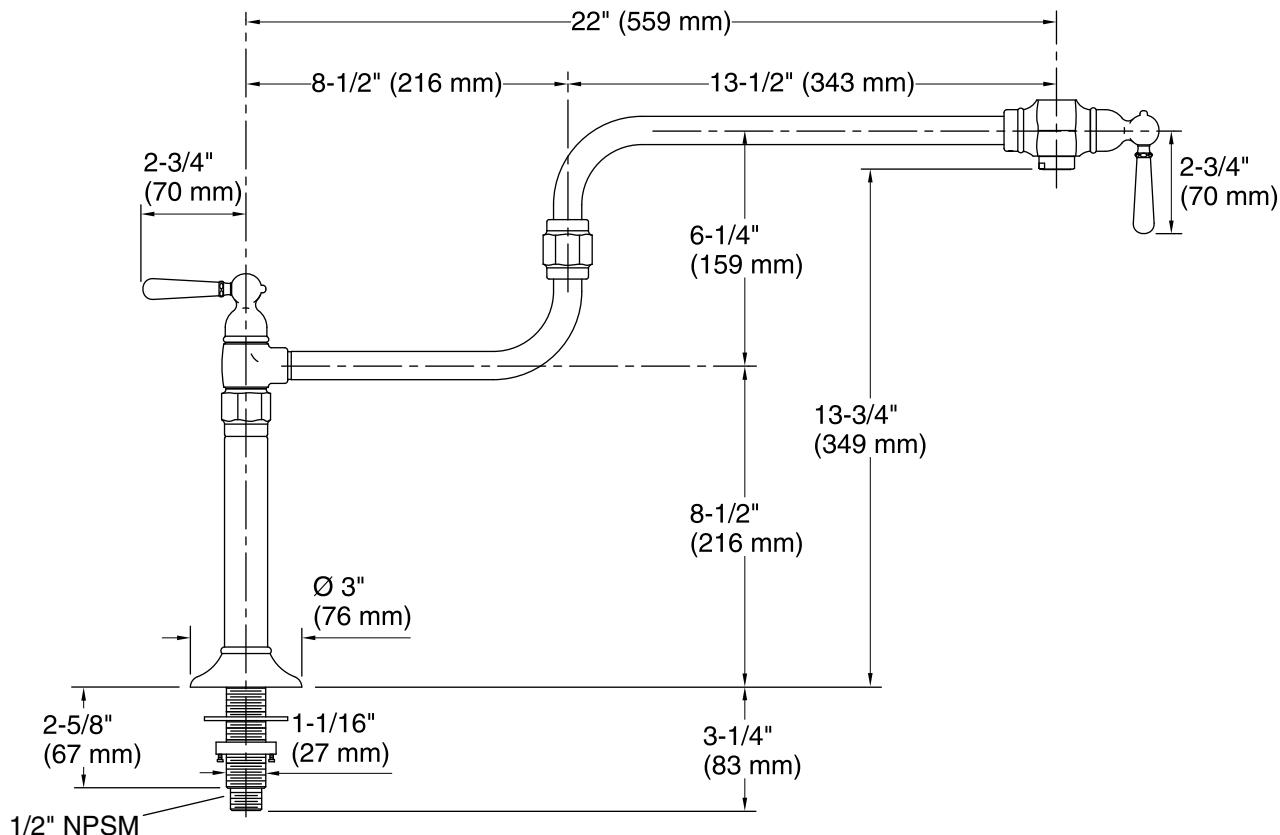

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 6.7 gal/min (25.4 l/min)  
Pressure: 60 psi (4.1 bar)

#### Spout:

Spout reach: 22" (559 mm)  
Handle clearance: 2-3/4" (70 mm)

### Notes

Install this product according to the installation guide.