

Lead-Free* Bronze Stop & Drain Valves

Features: Silicon Performance Bronze® alloy


Approvals: NSF/ANSI 61-8 (includes annex F and G) and NSF/ANSI 372

Pressure rating: 125 PSI non-shock cold working pressure

Maximum pressure / temperature: 125 PSI at 180° F

Lead-free* markings:

Double oval in body casting and white handle



MATERIALS LIST


PART	SPECIFICATION
Body	ASTM B584 Alloy C87850
Bonnet	ASTM B584 Alloy C87850
Stem	Cold-formed Copper Alloy
Seat Disc	EPDM
Seat Disc Screw	Stainless Steel, Type 410
Packing Nut	Free Cutting Brass - ASTM B16
Packing	Graphite Impregnated, Asbestos-Free
Handwheel	Epoxy Coated Zinc Alloy
Handwheel Screw	Carbon Steel - Clear Chromate Finish



726-LF
Cup x Cup




76-LF
FIP x FIP

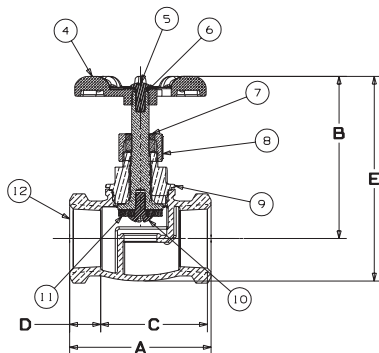

76-LF

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		A	B	
Stop & Waste Valve FIP x FIP	1/2"	2 ³ / ₁₆ "	2 ⁹ / ₁₆ "	.54 lb
	3/4"	2 ⁵ / ₁₆ "	2 ⁹ / ₁₆ "	.60 lb

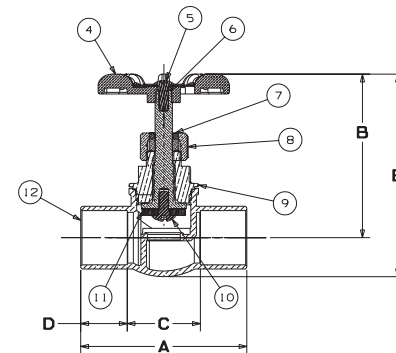

726-LF

DESCRIPTION	*NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B	C	
Stop & Waste Valve Cup x Cup	1/2"	2 ⁹ / ₁₆ "	1 ³ / ₁₆ "	.42 lb
	3/4"	2 ⁹ / ₁₆ "	1 ³ / ₁₆ "	.49 lb

DIMENSIONS—WEIGHTS—QUANTITIES

NOM SIZE	A	B	C	D	E	F	76-LF	726-LF	Master
In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	In. mm.	Lbs. Kg.	Lbs. Kg.	Ctn Qty.
1/2 15	2.16 55	2.19 56	1.44 37	0.36 9	3.06 78	2.12 54	0.54 0.XX	0.42 0.XX	50
3/4 20	2.28 58	2.31 59	1.28 33	0.50 13	3.21 82	2.12 54	0.60 0.XX	0.49 0.XX	50

*Weighted average lead content ≤ 0.25%