





FEATURES

- Nylon impact and corrosion resistant discharge head, motor adapter and cable guard.
- Pump shell constructed with a press and roll process for better performance.
- 303 stainless steel pump parts for maximum corrosion resistance.
- May be powered by any 4" NEMA design submersible motor.
- Noryl® Impeller-diffuser assemblies are mounted on 303 stainless steel hex shaft for positive drive.
- Noryl-stage components (impellers/diffusers) are permanently bonded by a reliable, foolproof, ultrasonic welding technique.



 **REDJACKET SERIES**

Grizzly 50 Hz

50 Hz Residential Water

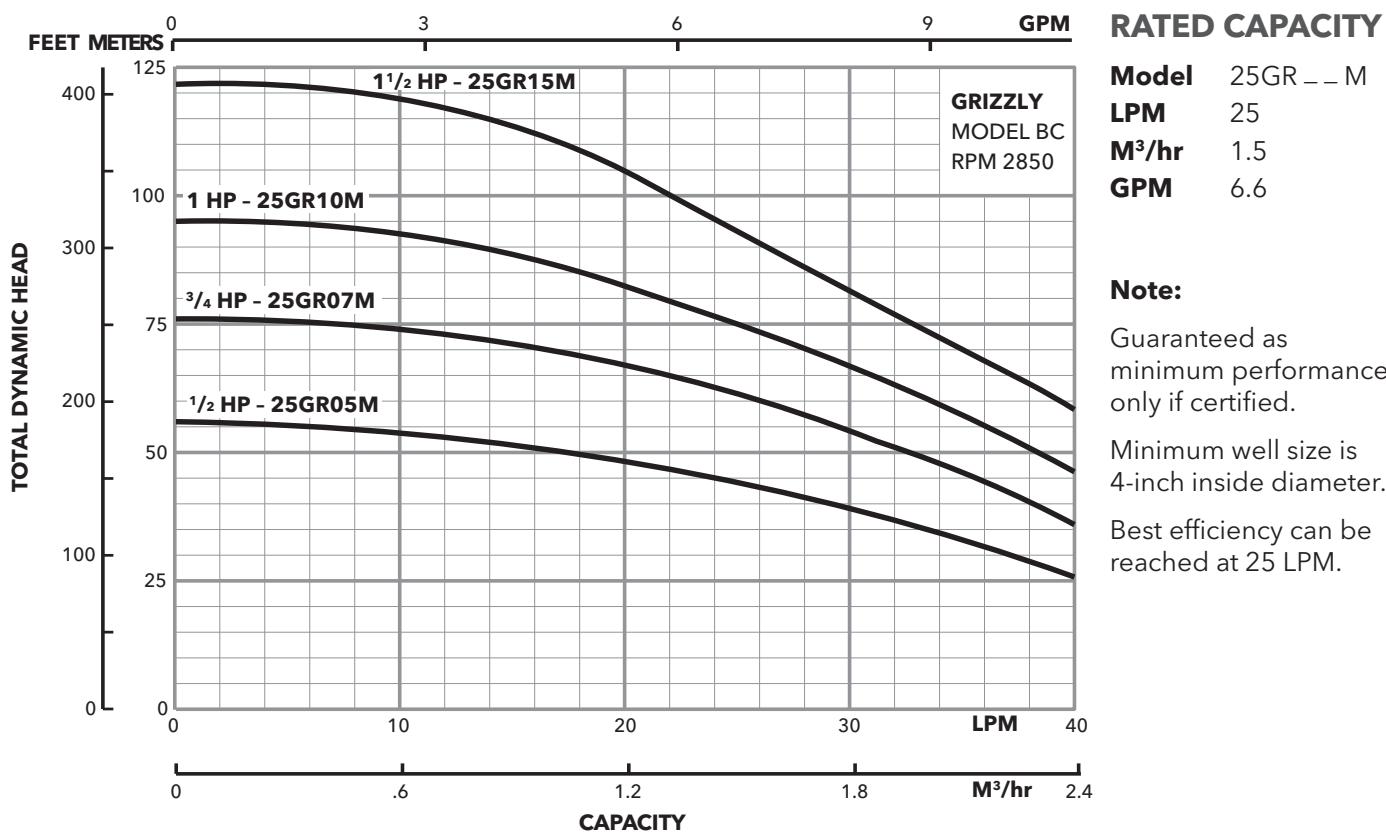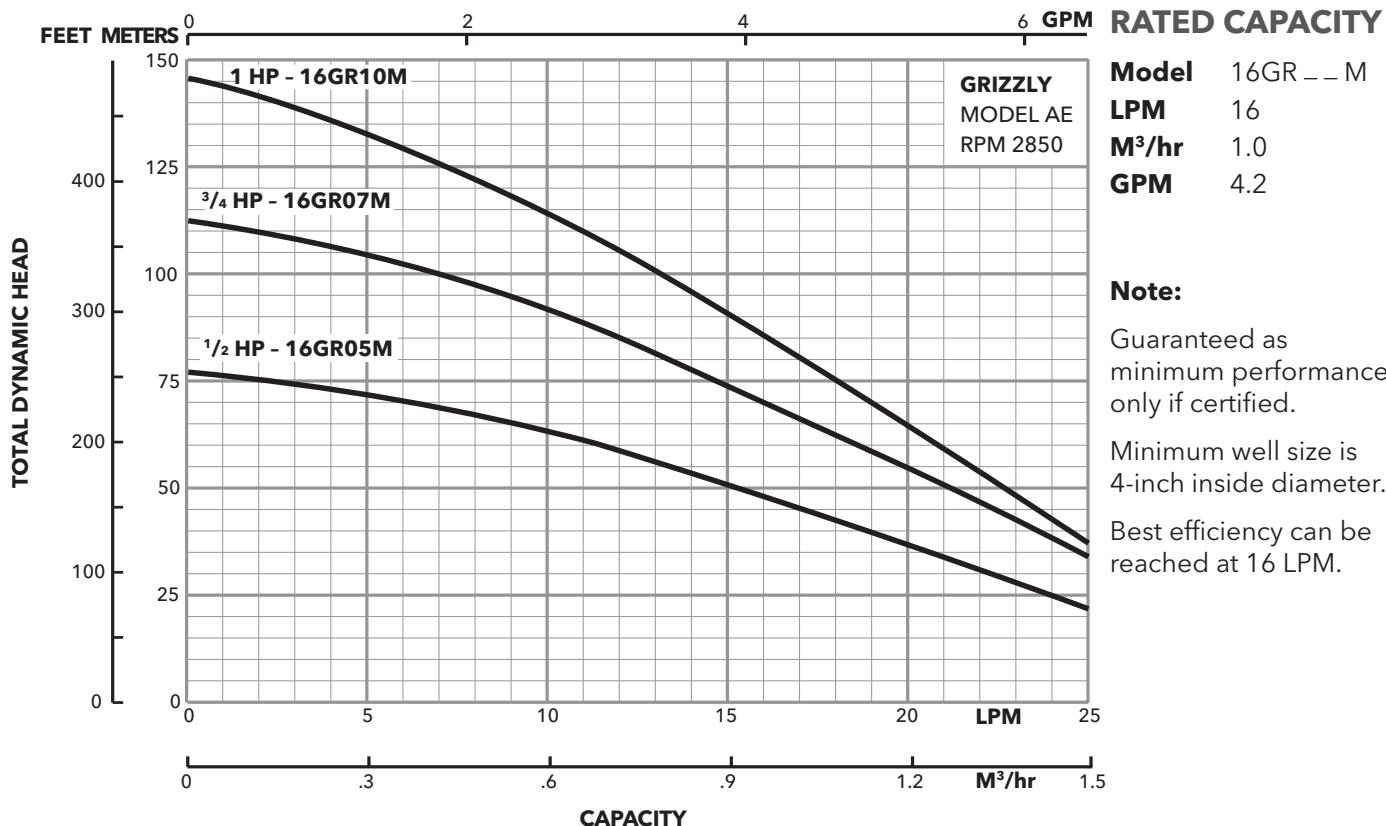

50 Hz Residential Water

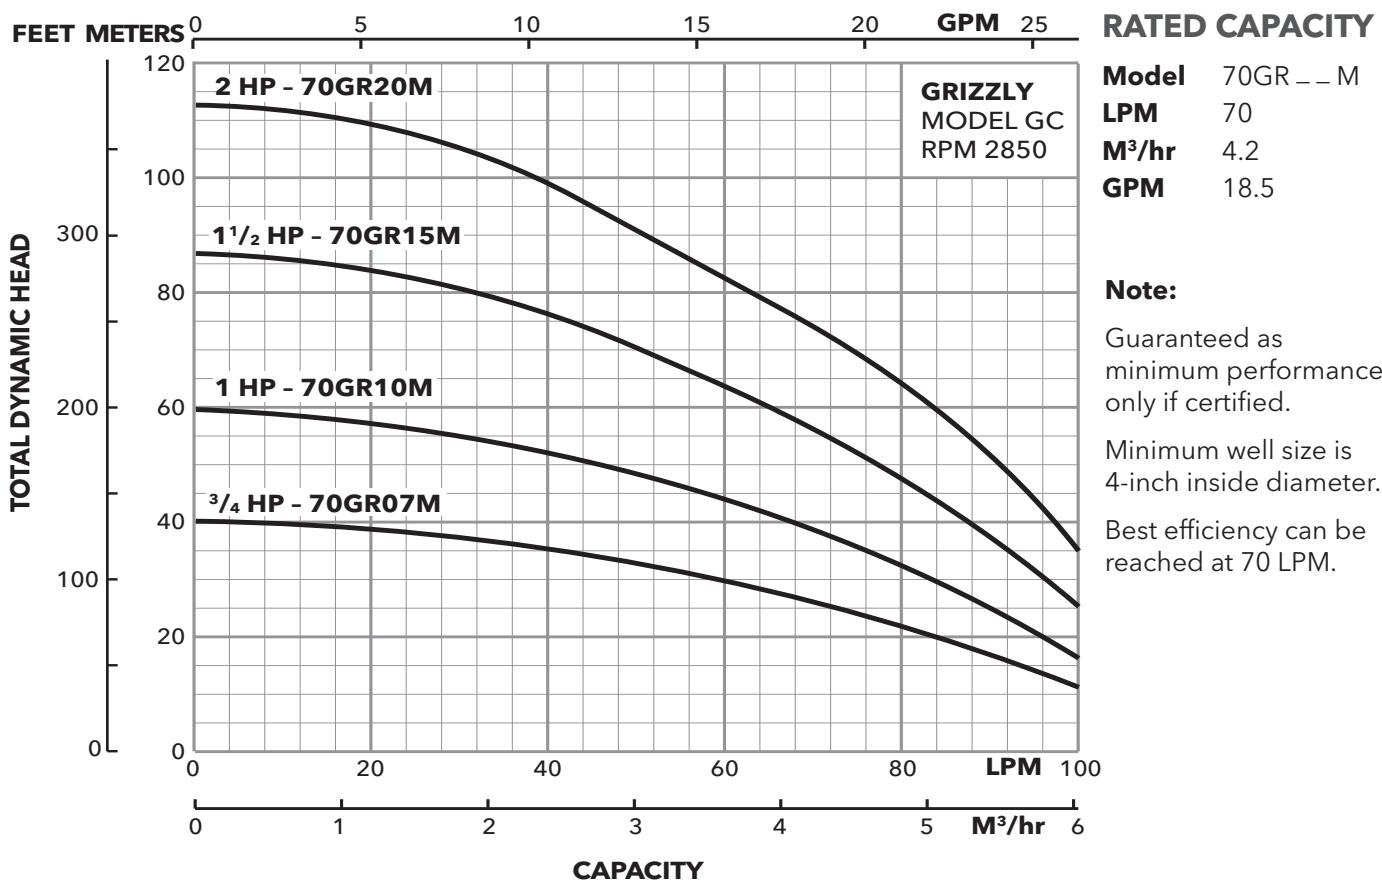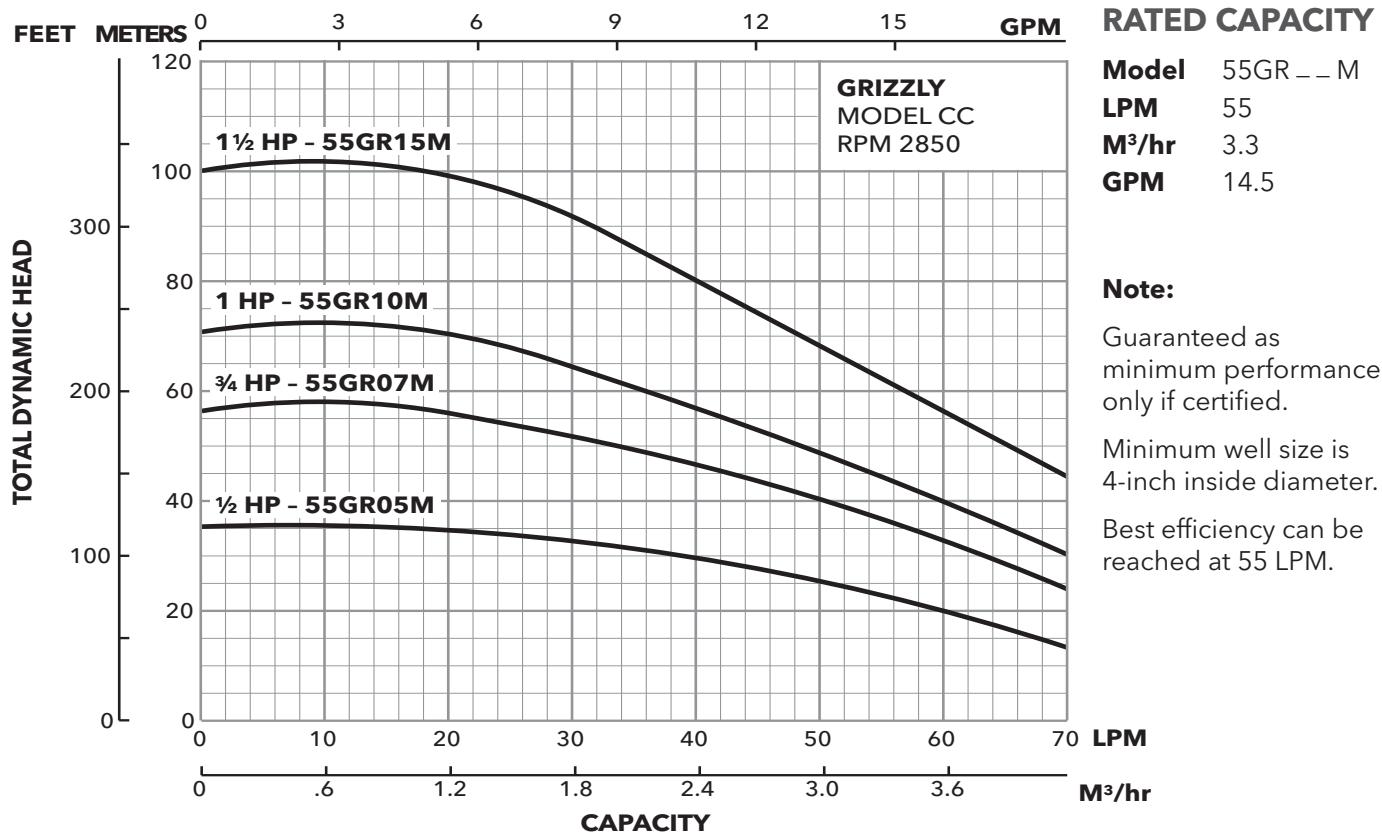

GRIZZLY LENGTHS AND WEIGHTS

Order No.	Required Minimum HP	Stages	Length MM (in.)	Weight (kg)
16GR05M	1/2	15	510 (20.09)	3.1
16GR07M	3/4	22	698 (27.47)	3.2
16GR10M	1	29	858 (33.76)	6.4
25GR05M	1/2	9	370 (14.59)	2.7
25GR07M	3/4	12	441 (17.35)	2.8
25GR10M	1	15	511 (20.11)	3.1
25GR15M	1 1/2	19	622 (24.47)	3.7
55GR05M	1/2	5	277 (10.91)	1.8
55GR07M	3/4	8	347 (13.67)	2.6
55GR10M	1	10	394 (15.51)	2.7
55GR15M	1 1/2	14	487 (19.19)	3.0
70GR07M	3/4	6	330 (12.99)	1.9
70GR10M	1	9	415 (16.33)	2.7
70GR15M	1 1/2	13	528 (20.79)	2.9
70GR20M	2	17	659 (25.93)	3.3

NOMENCLATURE - 50 HZ GRIZZLY WATER ENDS

Ex. 16GR05M

			
Best Efficiency in LPM	Grizzly	HP	BSP
16		05 = 0.50 / 0.37	Metric Discharge Head
25		07 = 0.75 / 0.55	
55		10 = 1.00 / 0.75	
70		15 = 1.51 / 1.10	
		20 = 2.00 / 1.50	



Xylem Inc.
 2881 East Bayard Street Ext., Suite A
 Seneca Falls, NY 13148
 Phone: (866) 325-4210
 Fax: (888) 322-5877
goulds.com/redjacket

Red Jacket Water Products and Grizzly are trademarks of Xylem Inc. or one of its subsidiaries. Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license. Noryl is a registered trademark of GE Plastic.

© 2017 Xylem Inc. BRJGRIZZ50 R1 February 2017