



Revel®
Frameless Sliding Bath Door
K-707000-L

Technology

- Frameless, 1/4-inch-thick tempered Crystal Clear glass.
- Center-guided door system for smooth, quiet sliding action.
- Frameless design with minimal metal allows for greater ease of cleaning.
- Contemporary towel bar and knob combination offers storage on the outside of the door without encroaching on the bathing space.
- Low bottom track creates easy entry and exit to the bathing space.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- Out-of-plumb adjustability for simpler installation.

Installation

- Sliding bath door.
- Not for use in hospitality.

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

SHP

ABZ

BNK

Available Glass Options

Code	Description
------	-------------

L	Crystal Clear
---	---------------

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to www.kohler.com.

5-14-2019 02:20 - US/CA

THE BOLD LOOK
OF **KOHLER**®



Revel®
Frameless Sliding Bath Door
K-707000-L

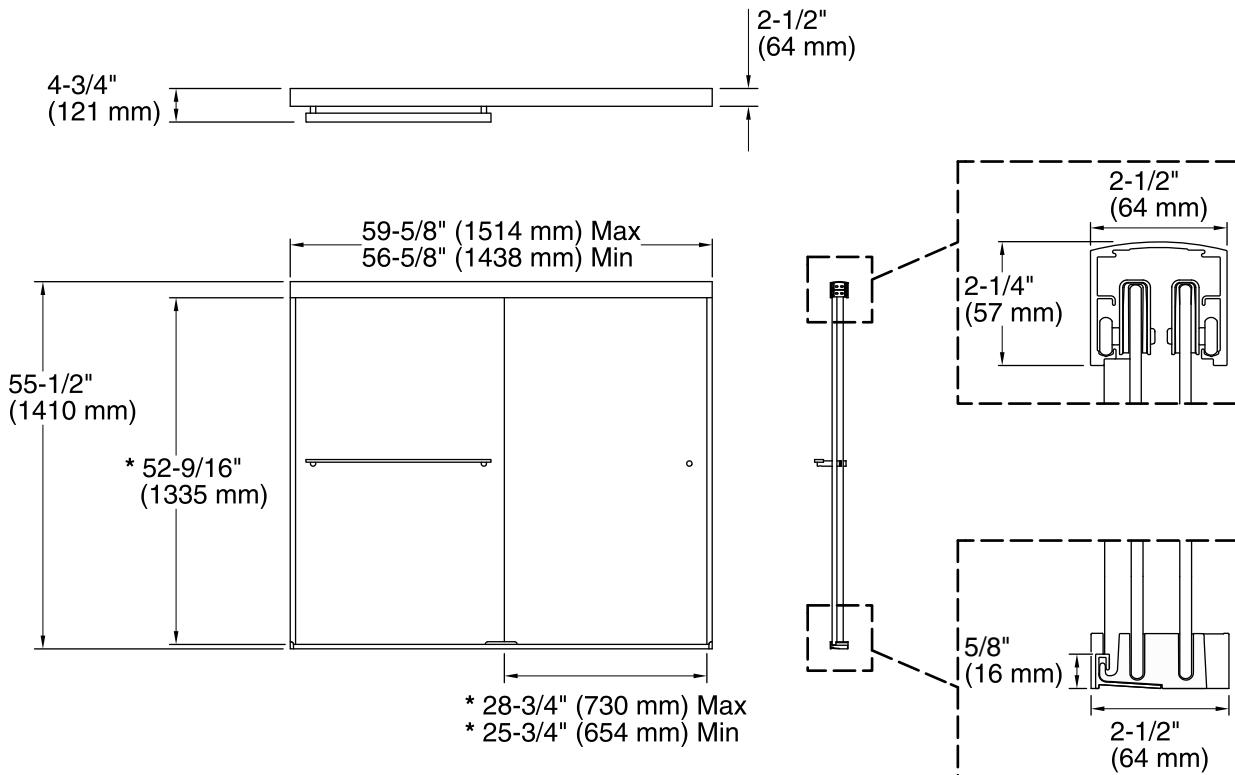

* Walk-Through

Technical Information

All product dimensions are nominal.

Installation type: For bath installation

Opening style: Sliding/Bypass

Opening Width - Min: 56-5/8" (1438 mm)

Opening Width - Max: 59-5/8" (1514 mm)

Walk-through - Min: 25-3/4" (654 mm)

Walk-through - Max: 28-3/4" (730 mm)

Glass thickness: 1/4" (6 mm)

Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 58" (1473 mm) to allow clearance for installing the top track over the wall jambs.