



Tercet®

5' Bath

K-1161



## Features

- Spacious design accommodates up to two bathers.
- Molded lumbar supports and armrests offer extra comfort while bathing.

## Material

- Acrylic

## Installation

- Drop-in or corner alcove.

## Recommended Accessories

K-1491 Bath/Whirlpool Pillow

K-11677 Bath Drain

K-1601 Bath/Whirlpool Footstop

K-7213 27" Cable Bath Drain

K-7214 27" Cable Bath Drain

K-7259 Clearflo Bath Drain

K-37382 45" Rough-in Cable Bath Drain



## Codes/Standards

CSA B45.5/IAPMO Z124

UL 1795

Greenguard UL 2818 - Gold

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

### Color   Code   Description


	0	White
	96	Biscuit
	47	Almond

# KOHLER®

## Tercet®


### 5' Bath

### K-1161

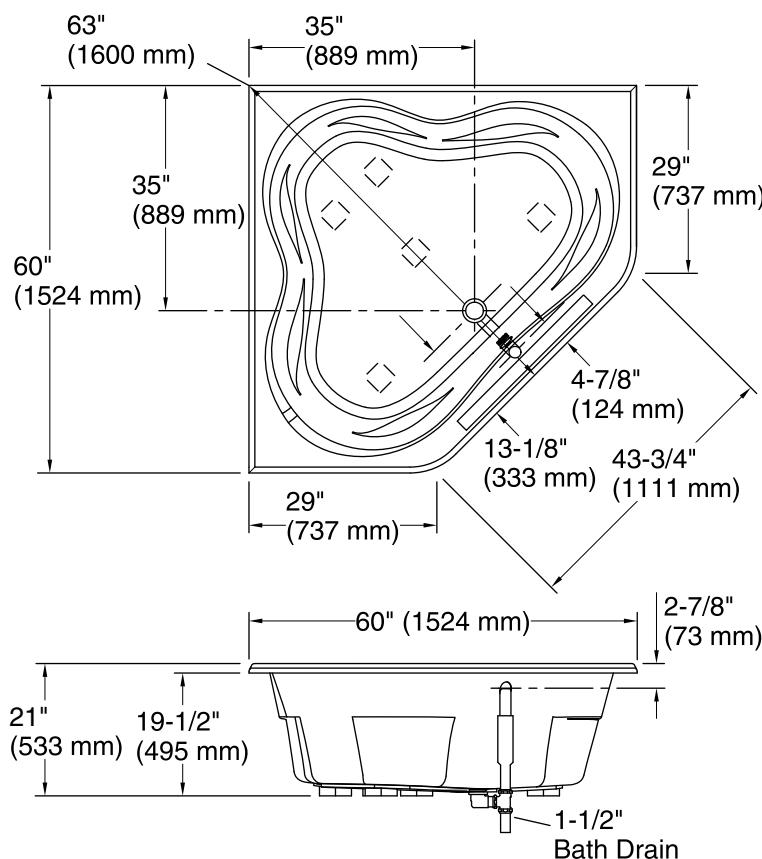


No change in measurements if connected with drain illustrated. (K-11677)


 Recommended Faucet Location



Drop-In Rim Style  
Cut-Out Detail



Drop-in Rim Detail

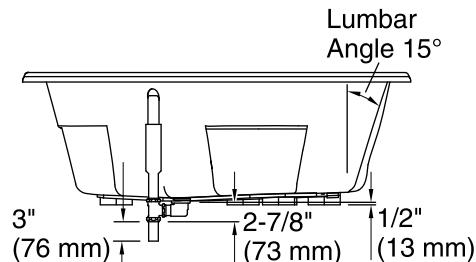

### Technical Information

All product dimensions are nominal.

Installation:	Drop-in
Drain location:	Center
Basin area, bottom:	52" x 38-3/4" (1321 mm x 984 mm)
Basin area, top:	61" x 46-1/4" (1549 mm x 1175 mm)
Weight:	91 lbs (41.3 kg)
Minimum floor load:	38 lbs/ft <sup>2</sup> (185.5 kg/m <sup>2</sup> )
Water depth:	15" (381 mm)
Water capacity:	96 gal (363.4 L)
Cutout:	Drop-in, 57-1/2" x 27-1/2" (1461 mm x 699 mm)

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.