

► **Code Number**
 20001010

► **Description**
 Complete system with exposed manual Sloan® closet Flushometer and vitreous china fixture.

► **Flush Cycle**
 • 1.28 gpf/4.8 Lpf

► **SPECIFICATIONS**

Quiet, exposed, diaphragm type, chrome plated closet Sloan® Flushometer and vitreous china floor mount fixture with the following features:

Flushometer Specification


- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action™
- Metal oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- With Specified Dual Flush Model, Lifting Handle UP initiates reduced flush (1.1 gpf/ 4.2 Lpf), Pushing Handle DOWN initiates full flush (1.6 gpf/ 6.0 Lpf)
- Spud Coupling and Flange for 1 1/2" Top Spud
- Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX® rubber compound for chloramine resistance
- Dual Filtered Fixed Bypass Diaphragm (DFB)
- 1" I.P.S screwdriver Bak-Chek® angle stop
- ADA Compliant Solar-Powered Solis® Infrared Sensor for automatic "No Hands" operation
- infrared Sensor with Multiple-focused,Lobular Sensing fields for high and low target detection

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1

- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- Vandal Resistant Stop Cap and Adjustable Tailpiece

Fixture Specifications

- Vitreous china
- Integral flushing rim
- Elongated bowl
- Siphon jet flush
- Dual Flush (when specified)
- Closet bolts and caps included
- 100% factory flush tested
- Toilet seat not included
- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT
- Compliant with Buy American Act when purchased as a combination
- 1 1/2" I.P.S. top spud inlet
- 2 1/8" fully glazed trapway diameter
- Recommended seats:
- Floor mounted
- Water closet compliant to the applicable sections of ASME A112.19.2/CSA B45.1

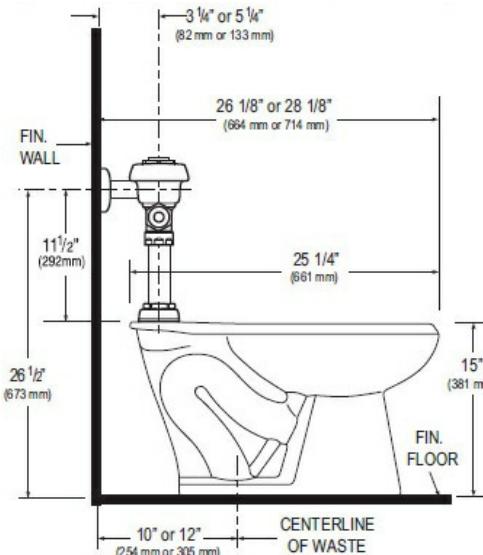

► **Disclaimer**

All information contained within this document subject to change without notice.

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

► **Compliance & Certifications**

ASSE-1037



This space for Architect/Engineer Approval

► Plumbing System Requirements

- Minimum Flow Rate: 25 GPM
- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI

► ROUGH-IN