

Features

- Compression molded from our exclusive Vikrell® material.
- Durable high gloss finish.
- 36" (914 mm) x 34" (864 mm) x 4-1/2" (114 mm) base finished dimensions.

**Installation**

- Suitable for tile down application or with STERLING wall surround.

**Codes/Standards**

CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
Greenguard UL 2818 - Gold
HUD, UM Bulletin 73

STERLING® Warranty - Fixtures Made of Solid Vikrell Material


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

	0	White
	96	KOHLER Biscuit

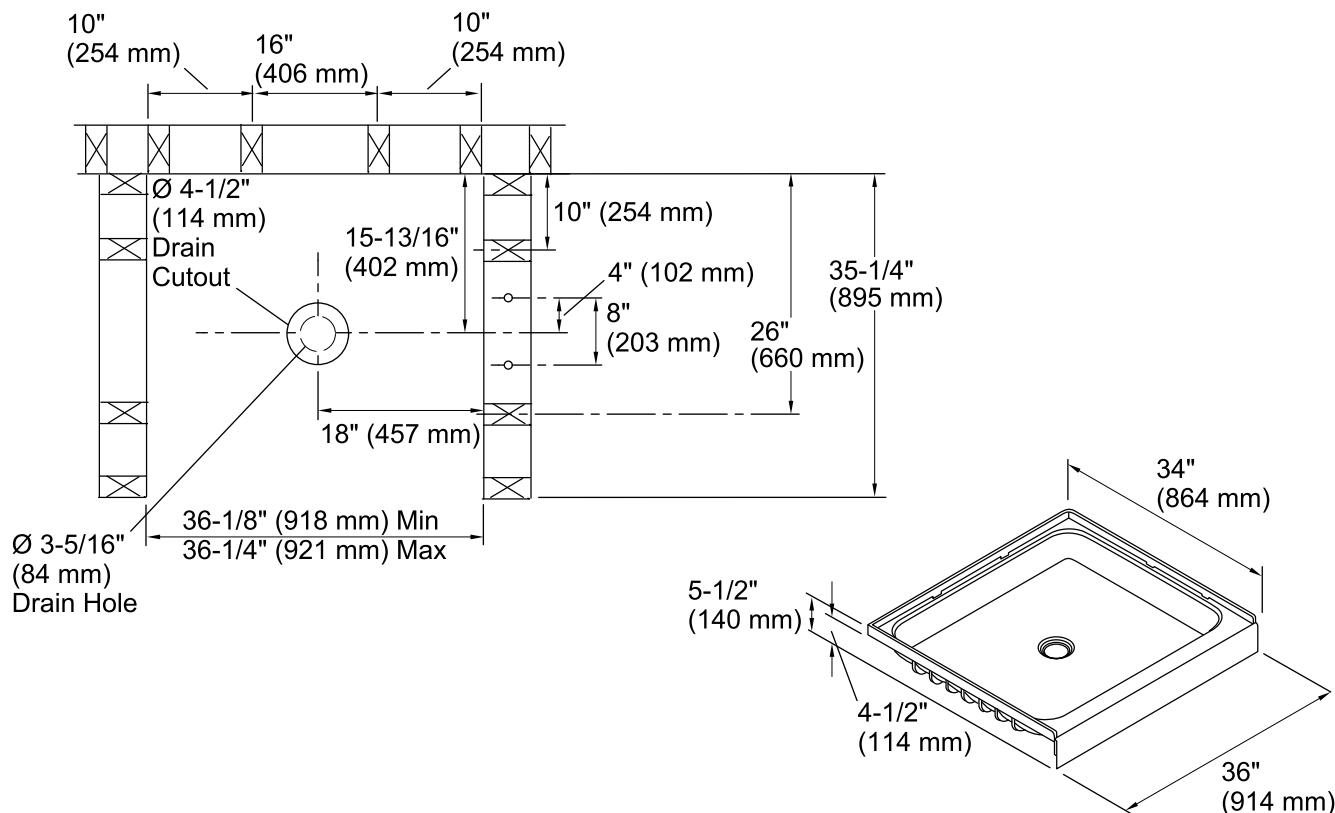

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Center

Minimum flat for door: 3" (76 mm)

Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.