

► Code Number
20001004

► Description
Combination package with exposed manual GEM 2® piston flushometer and vitreous china water closet.

► Flush Cycle
1.28 gpf/4.8 Lpf

Flushometer Specification

Quiet, diaphragm type, chrome plated closet Flushometer and vitreous china water closet with the following features:

- Metal oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- Free spinning Vandal Resistant Stop Cap and Adjustable Tailpiece
- Flex Tube Dual Filtered Bypass Diaphragm designed for improved life and reduced maintenance
- Spud Coupling and Flange for 1 ½" Top Spud
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- 1" I.P.S screwdriver Bak-Chek® angle stop
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1

- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

Fixture Specifications

- White vitreous china siphon jet flushing action achieves 1000g map score
- Elongated bowl
- Siphon jet flush
- Closet bolts and caps included
- 100% factory flush tested
- 2 1/8" fully glazed trapway diameter
- Floor mounted
- 1 ½" I.P.S. top spud inlet
- Toilet seat not included
- Compliant with Buy American Act when purchased as a combination

Recommended Seats

- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT


► Plumbing System Requirements

- Minimum Flow Rate: 25 GPM
- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI

► Disclaimer

All information contained within this document subject to change without notice.

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

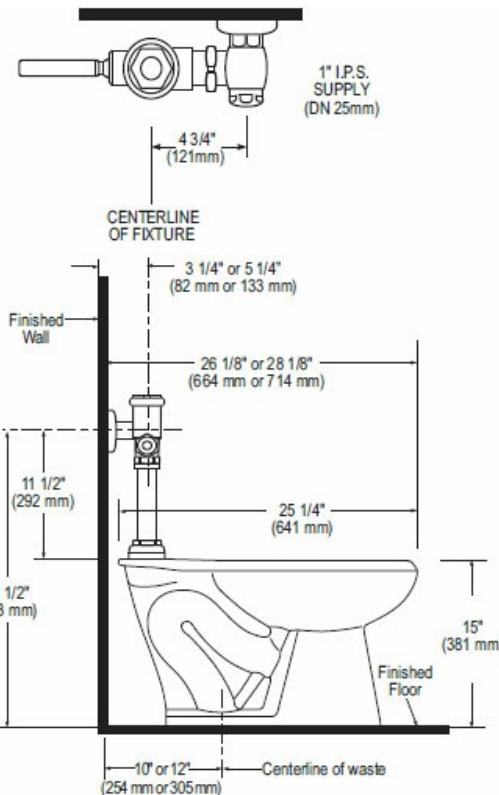

► Compliance & Certifications



CALGreen

This space for Architect/Engineer Approval