


KOHLER®
SERVICE KIT INSTRUCTIONS**FERRULE KIT****PURPOSE:**

The wooden ferrule extraction tool supplied with this kit is used to remove the existing ferrule from the lavatory overflow opening.

REMOVAL:

1. Insert one end of the extraction tool between the top of the ferrule flange and the lavatory enameled surface.
2. Apply sufficient downward force to compress the ferrule.
3. Apply a forward prying motion to remove the ferrule from the overflow opening.

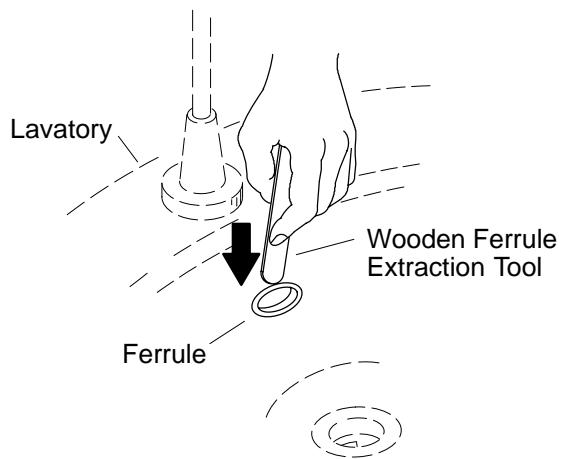

INSTALLATION:

4. Insert new ferrule into right side of overflow opening. Make sure the ferrule channel fits around overflow opening.
5. With thumb, apply an inward force to snap the ferrule into the overflow opening.

