

**Features**

- 8" (203 mm) centers.
- Rigid spout with 11" (279 mm) reach.
- 1/4-turn full brass ceramic valve.
- Vandal-resistant aerator.
- 4-1/16" vandal-proof metal wristblade lever handles.
- Drain sold separately.

**Material**

- Solid brass construction with thick chrome plating for rough commercial applications.
- 1.8 gpm (6.8 lpm) maximum flow rate at 60 psi (4.1 bar).

**Installation**

- Eccentric inlet shanks for easy installation.

**Recommended Products/Accessories**

K-23723 Faucet cleaner

**ADA** **CSA B651** **OBC**

**Codes/Standards**

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

**KOHLER® One-Year Limited Warranty**


See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color   Code   Description**

 CP   Polished Chrome

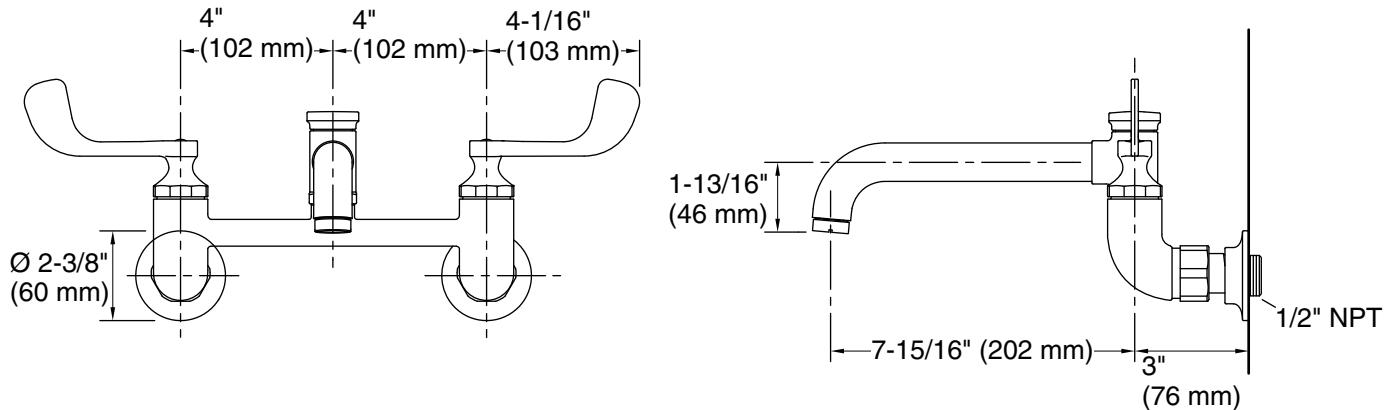

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.8 gal/min (6.8 l/min)  
Pressure: 60 psi (4.1 bar)

Valve body: Cast brass  
Drain included: No

#### Spout:

Spout reach: 11" (279 mm)  
Handle clearance: 3" (76 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.