

**Features**

- 8 (203 mm) centers.
- Swivel/rigid gooseneck spout.
- 8-3/16" (208 mm) spout reach.
- 1/4-turn full brass ceramic valve.
- Vandal-resistant aerator.
- 2-7/16" vandal-proof metal lever handles.
- Drain sold separately.

**Material**

- Solid brass construction with thick chrome plating for rough commercial applications.
- 1.8 gpm (6.8 lpm) maximum flow rate at 60 psi (4.1 bar).

**Installation**

- Eccentric inlet shanks for easy installation.

**Recommended Products/Accessories**

K-23723 Faucet cleaner

**ADA** **CSA B651** **OBC****Codes/Standards**

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1



CSA B651

OBC

**KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

**Available Colors/Finishes***Color tiles intended for reference only.***Color    Code    Description** CP    Polished Chrome

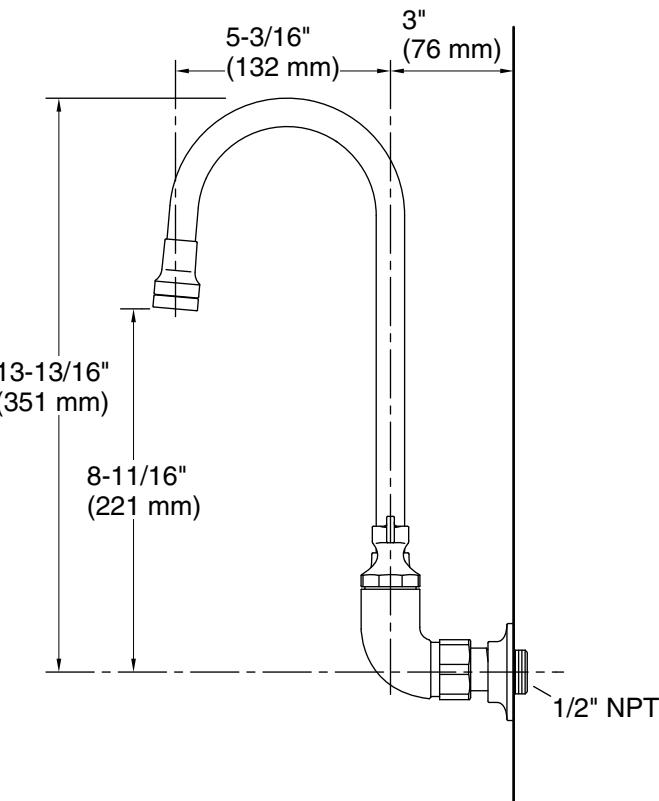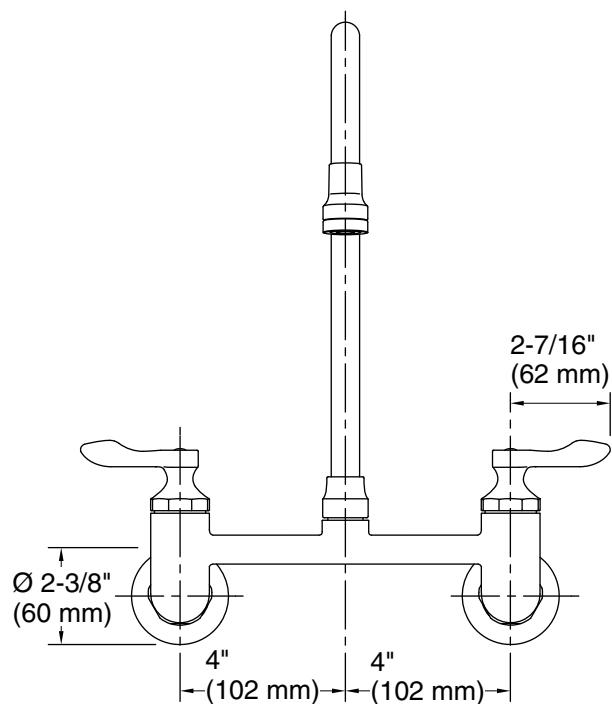

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.75 gal/min (6.6 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Cast brass  
Drain included: No

#### Spout:

Spout reach: 8-3/16" (208 mm)  
Handle clearance: 3" (76 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.