


0852NL SERIES NO LEAD BRASS HOSE BIBB QUARTER TURN

SPECIFICATION:

- Threads conform to ANSI/ASME B1.20.1
- Max Pressure Rating: 200 PSI WOG Non-Shock - WOG pressure rating based on ambient temperature
- Max Temperature Rating: 160°F (71°C)
- Hose thread outlet 3/4" GHT
- Stem Seal: Double O-ring
- Black cast handle




CERTIFICATION:

- NSF/ANSI Standard 61 & 372 Certified



MATERIAL LIST	
Part Name	Material
Body	No Lead Brass
Bonnet	No Lead Brass
Seat	PTFE
Ball	Chrome Plated Brass
Stem	No Lead Brass
O-ring	Rubber NBR
Handle	Cast Aluminum
Nut	Steel

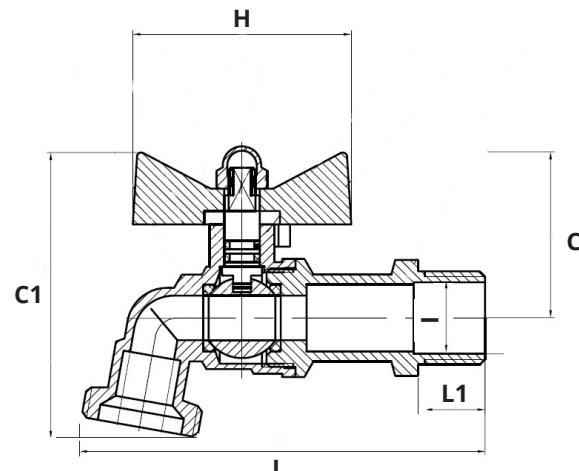

DIMENSIONS														
Part No.	Inlet Connection	I		H		C1		C		L		L1		Weight grams
		inches	mm											
0852-05NL	1/2" MPT	0.63	16.00	1.93	49.00	2.60	66.00	1.52	38.50	3.57	90.50	0.59	15.00	210
0852-07NL	3/4" MPT	0.75	19.00	1.93	49.00	2.60	66.00	1.52	38.50	3.66	93.00	0.71	18.00	260

BOSHART
INDUSTRIES

© 2020 Boshart Industries Inc. All Rights Reserved.

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com • blog.boshart.com