

Exposed TECK® Flush Valve

TECK®
COMMERCIAL



DELTA®

Specification: (example)

(FOR 1-1/2" TOP INLET CLOSET FIXTURE)

- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated body
- **External water conserving flush volume adjustment**, (except -48 and -6 models) factory set to 6 litre (1.6 gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube and S/S wall flange, spud flange and concealed spud nut
- **Recommended water supply:**
Minimum flowing pressure – 25 psi (172 kPa)
Minimum flow rate – 25 gpm (95 L/min)



81T261

WITH 610mm (24") "A" LENGTH AND 38mm (1-1/2") OFFSET

81T261


As above

81T261-6

Same as 81T261, but **Not Field Adjustable**

81T261-48

Same as 81T261, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**

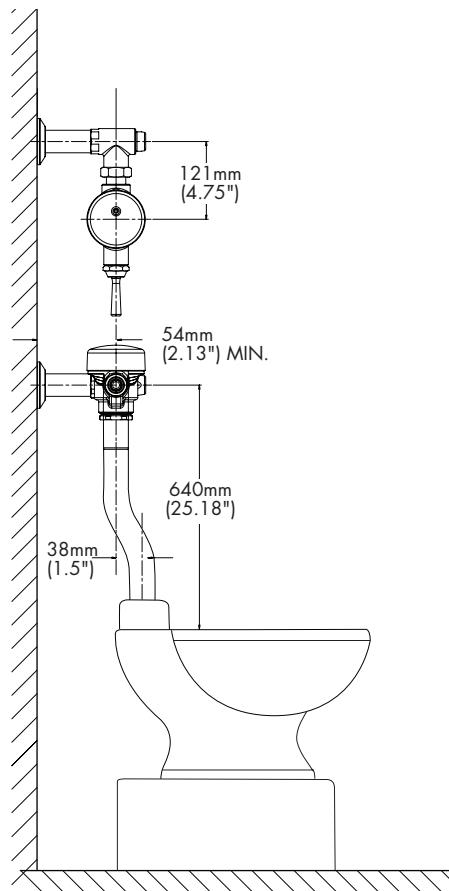

Approvals:

- IAPMO listed to ASSE 1037/
ASME A112.1037/CSA B125.37
- Indicates compliance to
ICC/ANSI A117.1
(Contact Delta Representative for State and/or
Local Approvals.)

Engineer/Architect Approval

Model Specified:

Approval:

Date:

Note: Measurements may vary \pm 6mm (0.25")

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.