



Model: \_\_\_\_\_ Item #: \_\_\_\_\_ Date: \_\_\_\_\_  
 Project: \_\_\_\_\_ Qty: \_\_\_\_\_ Approved By: \_\_\_\_\_

## E-Z Install Flexible Water Line Kits for Wall Mount Faucets


## Royal Series Plumbing

Model  
**21-443L**

3/8" E-Z Install Flexible Water Line Kit, 22" Long

### STANDARD FEATURES

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes 1/2" NPT Close Elbows with Swivel Compression fittings on faucet side & 3/8" Swivel Compression fittings on water supply side
- No soldering or teflon tape required

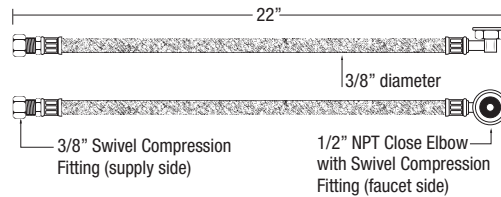

### SPECIFICATIONS

Length	22"L
Diameter	3/8"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F




Model  
**21-444L**

1/2" High Volume E-Z Install Flexible Water Line Kit, 22" Long

### STANDARD FEATURES

- (2) 1/2" stainless steel braided flexible supply Hoses
- Includes 1/2" NPT Close Elbows with Swivel Compression fittings on faucet side & 5/8" OD Compression fittings which are removable to convert to 1/2" NPS Male fittings on water supply side
- No soldering or teflon tape required on faucet side

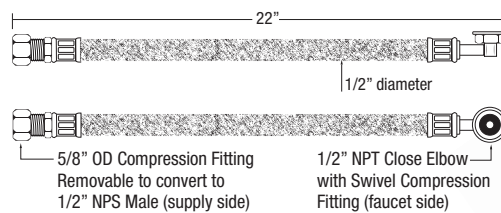

### SPECIFICATIONS

Length	22"L
Diameter	1/2"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F




Model  
**21-445L**

3/8" E-Z Install Flexible Water Line Kit, 30" Long with Mounting Hardware

### STANDARD FEATURES

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes 1/2" NPT Close Elbows with Swivel Compression fittings on faucet side & 3/8" Swivel Compression fittings on water supply side
- (2) 1/2" NPT Nipples, (2) washers, (2) locknuts
- No soldering or teflon tape required

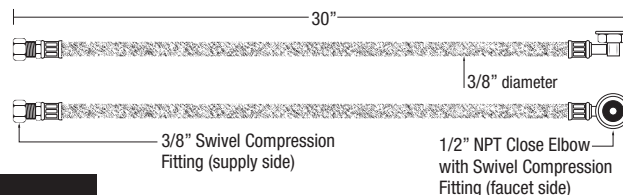

### SPECIFICATIONS

Length	30"L
Diameter	3/8"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F




Model  
**21-193L**

3/8" E-Z Install Traditional Flexible Water Line Kit, 24" Long with Mounting Hardware

### STANDARD FEATURES

- (2) 3/8" stainless steel braided flexible supply Hoses
- Includes (2) 1/2" x 1/2" NPT Close Elbows, (2) 1/2" NPT Nipples, (2) washers, (2) locknuts
- 1/2" Compression fittings on faucet side and 3/8" Swivel Compression fittings on water supply side
- No soldering or teflon tape required

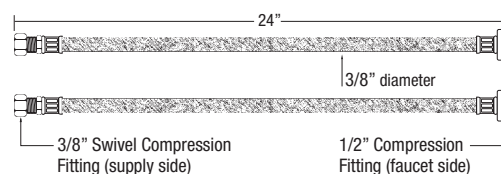

### SPECIFICATIONS

Length	24"L
Diameter	3/8"
Pressure	20 - 125 PSI
Temp. Range	40°F to 180°F

