

Features

- Includes valve body, thermostatic cartridge, rough-in guide and mud guard.
- 1/2" Universal NPT and direct sweat inlets and outlets.
- 9 gpm (34 l/min) maximum flow rate at 45 psi.
- Single lever design cycles from off through cold to hot.
- One-piece cartridge design simplifies installation and maintenance.
- Adjustable high-temperature limit stop to control maximum water temperature.
- Requires valve trim to complete installation (sold separately).

**Material**

- Forged dezincification-resistant brass body provides long term reliability and resistance to aggressive water conditions.

Technology

- Thermostatic technology automatically maintains outlet temperature within +/- 3.6°F (+/- 2°C) during water pressure fluctuations.

Installation

- Designed for use in standard, back-to-back and thin wall installations.
- Valve body features integral mounting locations and symmetrical valve inlets to simplify installation.
- Cartridge is reversible for installations where hot and cold supplies are reversed.
- Rough-in guide designed for both standard and thin wall installations.
- Installed valve rough-in can be flushed and pressure-tested to 150 psi max (air or water) without cartridge by using included test cap.

Optional Products/Accessories

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies



Codes/Standards

ASME A112.18.1/CSA B125.1


ASSE 1016/ASME A112.1016/CSA B125.16

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

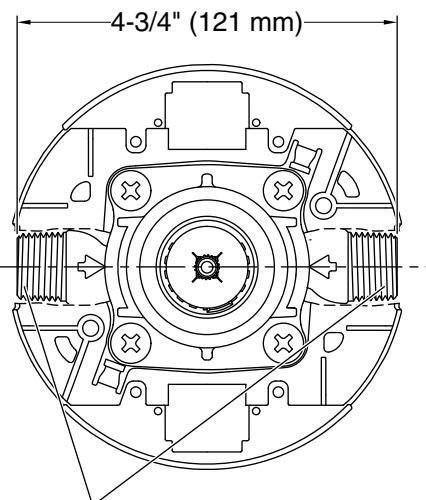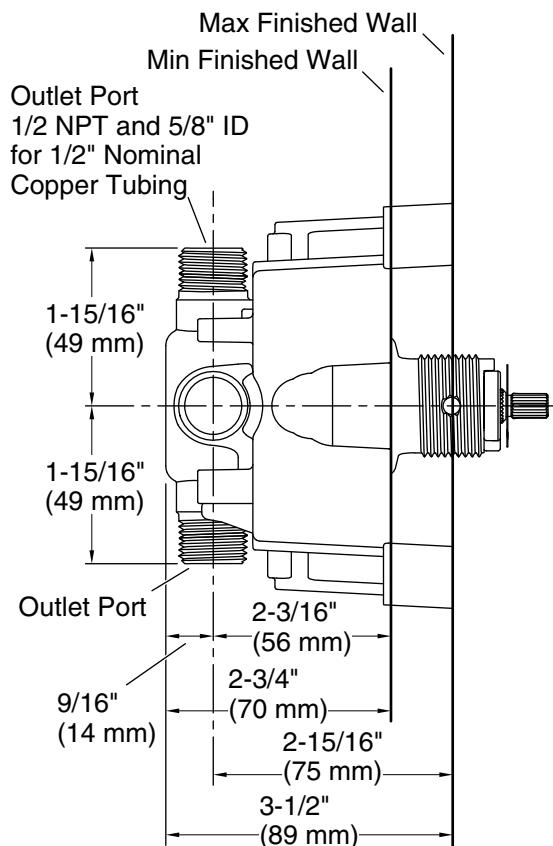

Inlet Port
1/2 NPT and 5/8" ID
for 1/2" Nominal
Copper Tubing

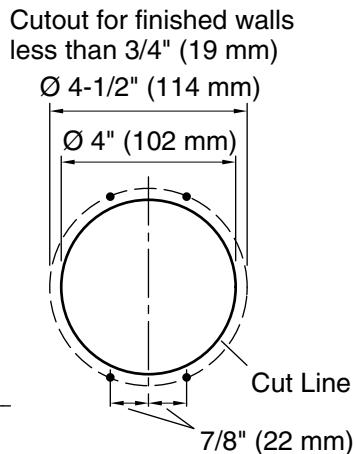

Cutout for finished walls
less than 3/4" (19 mm)



Technical Information

All product dimensions are nominal.

Shower Valve:

Flow Rate (Max) @ 45 psi

9 gal/min (34.1 l/min)

Manufacturer's minimum rated flow:

1.5 gal/min (5.7 l/min)

Pressure:

45 psi (3.1 bar)

Maximum (Static) Pressure:

125 psi (8.6 bar)

Minimum (Operating) Pressure:

20 psi (1.4 bar)

Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 1.5 gal/min (5.7 l/min) or higher.