



Tend™

Contemporary washout urinal with rear spud
K-20713-ER

Features

- Compact, modern washdown urinal with no exposed bolt connections.
- 0.125 - 1.0 gpf (0.47 - 3.8 lpf).
- Winning design is perfect for contemporary bathrooms.
- Smooth contours make cleaning fixture fast and easy.
- Back wall design provides superior splash containment.
- ¾" (19 mm) rear spud.



Material

- Vitreous china.

Technology

- Extended lip helps keep floor cleaner.
- Innovative trapway can be removed and replaced if necessary.

Installation

- Trapway secures urinal to wall, eliminating bolts for a faster installation.

Included Components

Additional Components:

- 2" outlet spud
- 3/4" inlet spud
- Hanger

ADA



Codes/Standards

- ASME A112.19.2/CSA B45.1
- DOE - Energy Policy Act 1992
- EPA WaterSense®
- California Energy Commission (CEC)
- ADA
- ICC/ANSI A117.1

Kohler® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

	0	White
	7	Black Black™



Tend™
Contemporary washout urinal with rear spud
K-20713-ER

Note: Customer Connection Pipe
must have 2" NPT External Thread.

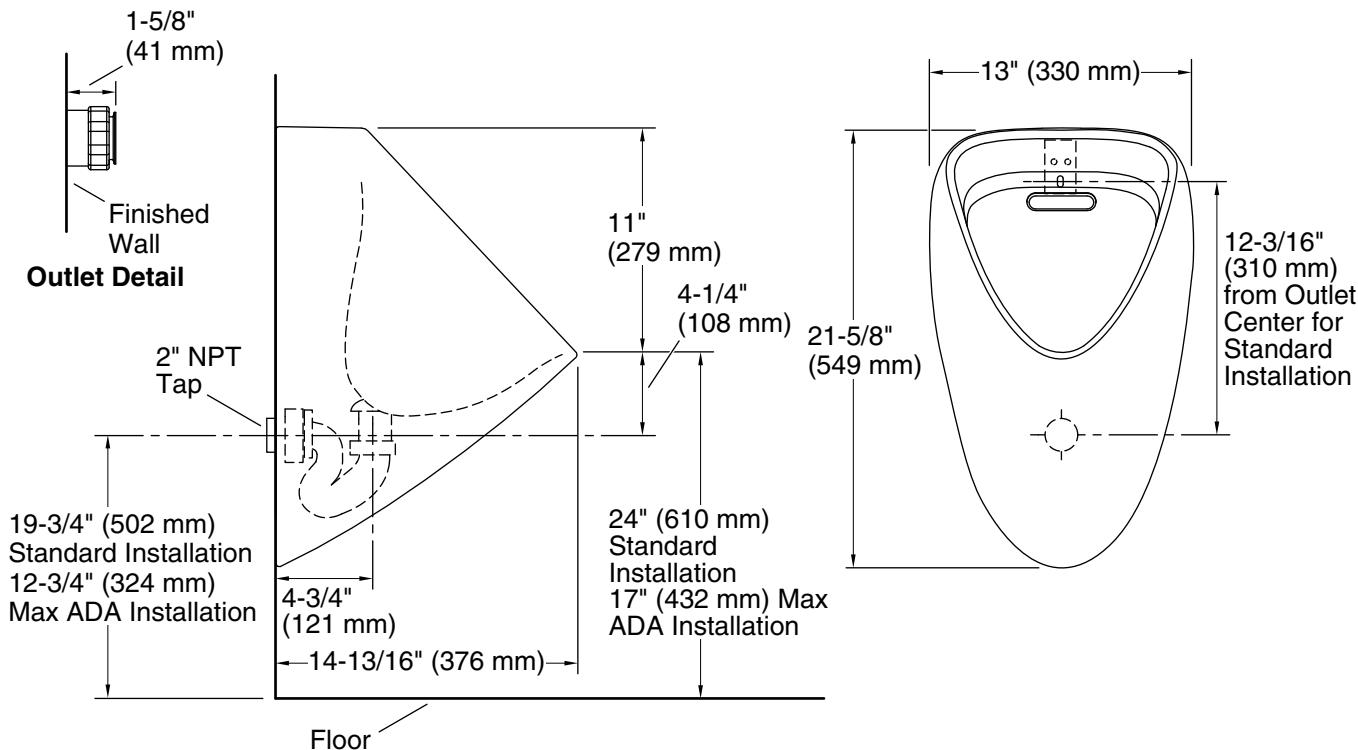

Technical Information

All product dimensions are nominal.

Flush outlet technology:	Washdown
Min. Water per Flush:	0.125 gal (0.5 L)
Max. Water per Flush:	1 gal (3.8 L)

Designed for the above water use when installed with a water-saving flushometer.

Pressure and Supply Requirements

Fixture pressure min 25 psi (172.4 kPa)
(static):

Fixture pressure max (static): 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

Refer to manufacturer's instructions and local codes for flushometer requirements.

ADA compliant when installed to the specific requirements of these regulations.