



Specifications

DESCRIPTION

- Brass construction with chrome plated finish
- 1/2" IPS connections
- 8" widespread

OPERATION

- Lever style handles with hot and cold color indicators
- Vandal resistant torx head screws
- 1/4 turn to open (clockwise to close)

FLOW

- Aerator is limited to 2.2GPM Max (8.34 Min.)

CARTRIDGE


- Brass shell, ceramic disc cartridge
- Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable specifications referenced therein
- Certified to NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- ADA f

WARRANTY • Warranted for 5 years against material or manufacturing defects.

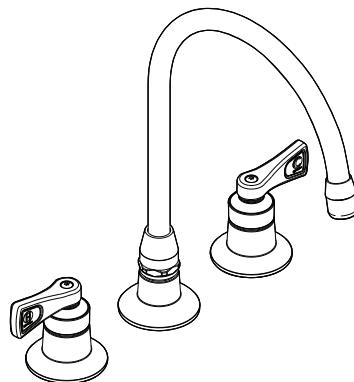


Two-Handle Lavatory Faucet with Spout

Model: 8227



NOTE: Designed to be installed through
3 holes - 1-9/32" min. dia.

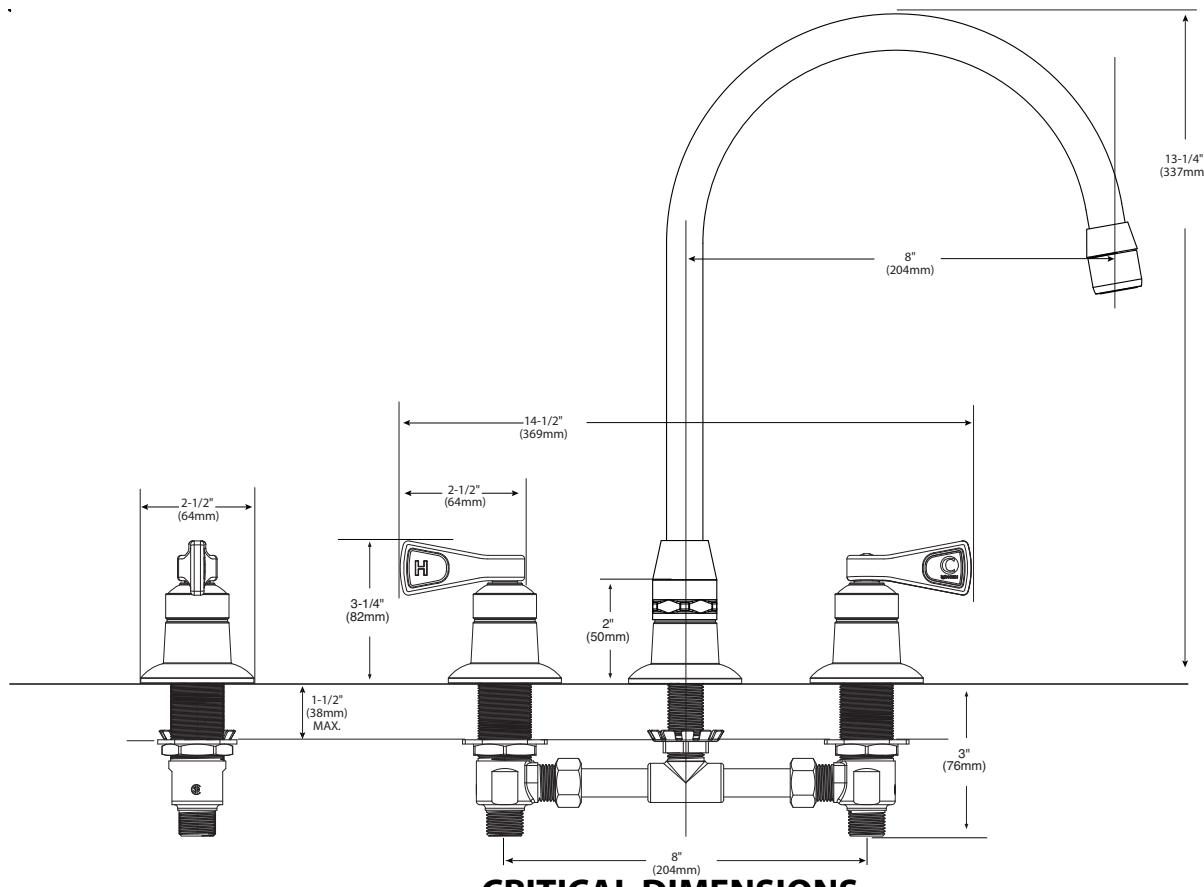

CRITICAL DIMENSIONS

(DO NOT SCALE)

MOEN SPECIFIER SERVICES 1-800-321-8809 Ext. 2158

www.moen.com