


4480 Bellows Type Water Hammer Arrestor

Regularly Furnished: All stainless steel Shokstop (water hammer arrestor) with welded nested bellows and NPT threaded connection. Wade Shokstops are certified under PDI Standard WH-201 and ASSE-1010. Wade Shokstops are maintenance free and are approved for sealed wall installation.

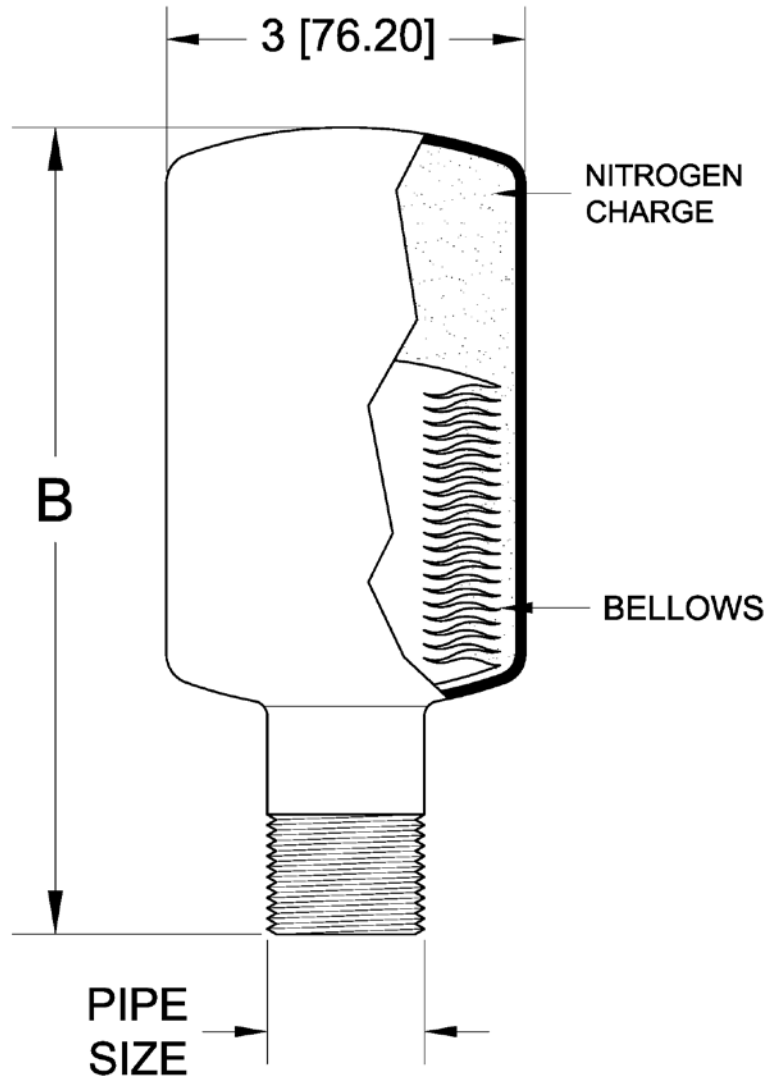

✓	PDI Size	Fixture Units	Pipe Size	B
	A	1-11	¾" (19)	2-1/8 (54)
	B	12-32	1" (25)	4 (102)
	C	33-60	1" (25)	4-3/8 (111)
	D	61-113	1" (25)	5-1/2 (140)
	E	114-154	1" (25)	6-15/16 (176)
	F	155-330	1" (25)	6-15/16 (176)

Options		
✓	Suffix	Description
	-BAA	Buy America Act Compliant

Materials / Specifications

- Bellows: Stainless Steel
- Case: Stainless Steel
- Charge: Nitrogen
- Temperature: -100°F to 300°F
- Max Operating Pressure: 125 PSI
- Certification: PDI WH-201