



**McGuire Manufacturing Co., Inc.**

60 Grandview Court  
 P.O. Box 746 • Cheshire, CT 06410  
 203-699-1801 • Fax: 203-699-1813  
 www.mcguiremfg.com

**PRODUCT SPECIFICATION**


**Part No.**

**8872, 8902, 8902CNC,  
 8912, 8912CNC, 8903, 8904**

**Cast Body P-Trap  
 With or Without Cleanout**

**Job Name:**

**Submittal Number:**

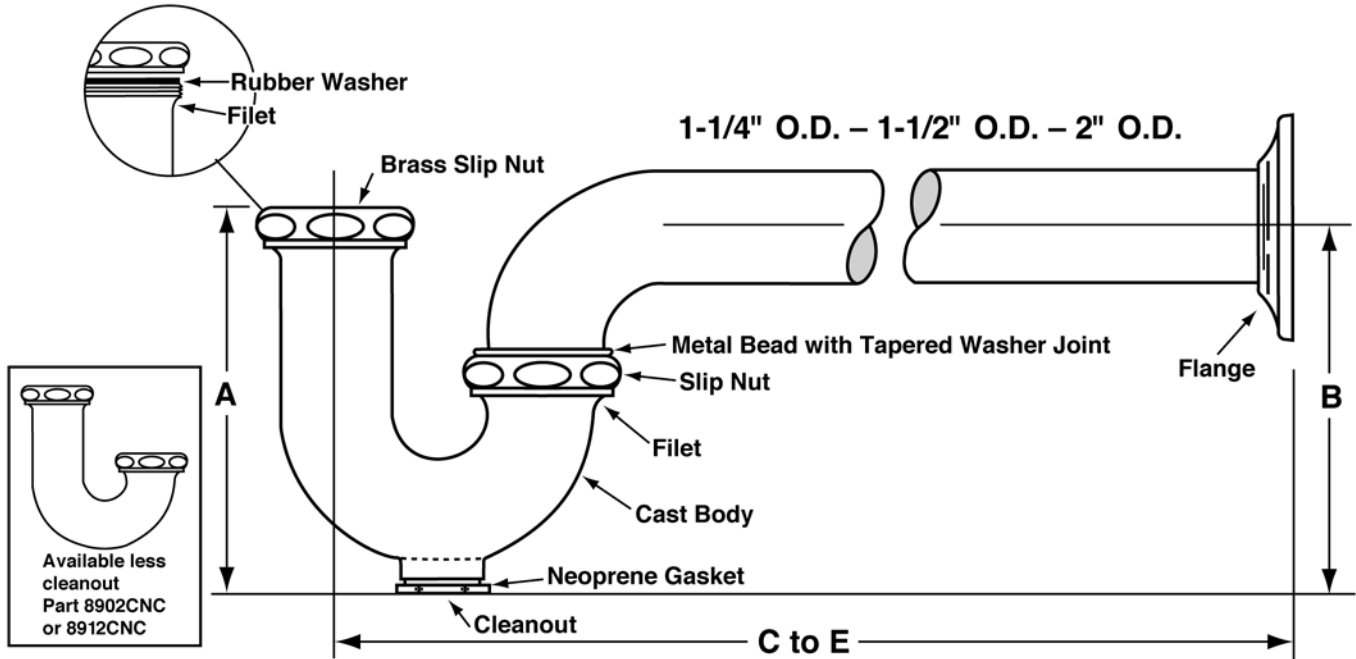

Available less cleanout  
 Part 8902CNC  
 or 8912CNC

**PROFESSIONAL LINE**

**ROUGHING MEASUREMENTS**

NO.	TRAP DIMENSIONS		A	B	C to E
	INLET	OUTLET			
8872	1-1/4"	1-1/4"	4-1/2"	4-1/4"	11-1/2"
8902	1-1/4"	1-1/2"	5"	5-1/2"	11-1/2"
8902CNC	1-1/4"	1-1/2"	4-5/8"	4-3/4"	11-1/2"
8912	1-1/2"	1-1/2"	5"	5-1/2"	11-1/2"
8912CNC	1-1/2"	1-1/2"	4-5/8"	4-1/8"	11-1/2"
8903	1-1/2"	2"	5"	6"	13-3/4"
8904	2"	2"	5"	6"	13-3/4"

**FED SPEC W.W.P. 541  
 CAST BRASS P TRAP  
 MINIMUM SEAL 2"**



See options and accessories section for details on product variations.

ASME A112.18.1-2011/CSA B125-2.11

**Specifications:**

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall be McGuire "Classic" Professional Line (8872C, 8902C, 8912C, 8903, 8904). Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.