

► Code Number

3326011

► Product Specification

Model MIX-110-AA is only available with Sloan Optima and Optima Plus Faucets that are specified with the ADM (Above-Deck-Mixer) variation.

► Description

Above Deck Manual Water Temperature Control Valve for use with Sloan OPTIMA® Sensor Operated Faucets.


► Specifications

- All Metal Valve Body with Ceramic Cartridge
- ADA Compliant Lever Handle with Hot and Cold Position Indicators
- Flexible Supply Line with 3/8" Compression Fittings (for connection to spout)
- Integral Check Valves Located in Inlets of Hot and Cold Supply Fittings
- Hot Water Temperature Limit Stop
- Mounting Hardware and Installation Instructions


Trim Plate is supplied with the Optimix Valve when furnished with the faucet as the "ADM" (Above-Deck-Mixer) variation. Trim Plates are available for both 4" (102 mm) and 8" (203 mm) centerset spread lavatories. The "ADM" variation is available with most Sloan Optima and Optima Plus faucet models. Consult the faucet specification sheets to determine the availability of this and other mixing options.



MIX-100-A
Shown with EBF-85 Faucet †

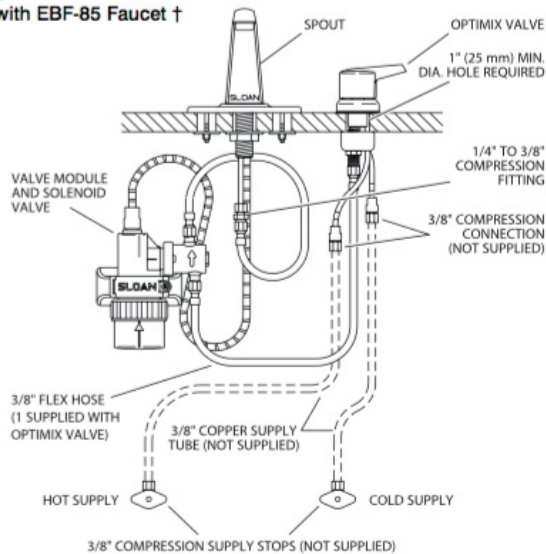

MIX-110-AA
Shown with ETF-660 Faucet †

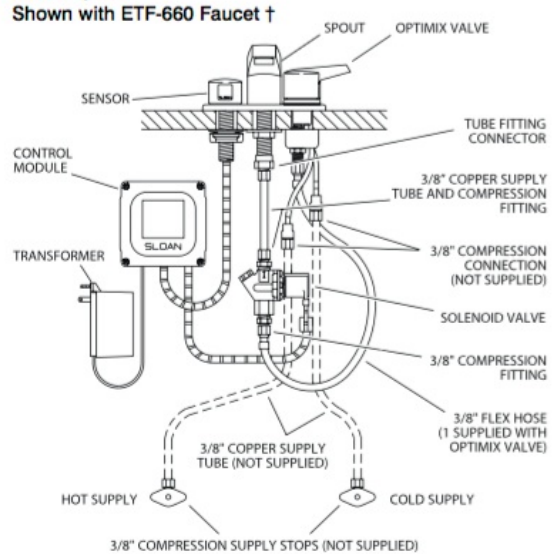

† The above rough-ins are representative of a typical Optimix installation. Installation may vary slightly depending on the model of Sloan faucet used. See faucet specification sheet for more information

Available Models:

- ☐ MIX-100-A Stand Alone - 3326011
- ☐ MIX-110-A-1 w/4" Trim Plate Kit - 3326021
- ☐ MIX-110-A-2 w/8" Trim Plate Kit - 3326022
- ☐ MIX-110-A-3 w/4" Trim Plate Kit - 3326023
- ☐ MIX-110-A-5 w/8" Trim Plate Kit - 3326025

► Compliance & Certifications



This space for Architect/Engineer Approval