

► Code Number

1000100

► Description

Complete HEU system with exposed manual Royal® urinal Flushometer and vitreous china urinal fixture.

► Flush Cycle

- 0.125 gpf/0.5 Lpf

► SPECIFICATIONS

Flushometer Specification


- PERMEX® Synthetic Rubber Diaphragm with Dual Bypass
- Non-Hold-Open Operation
- ¾" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Free spinning Vandal Resistant Stop Cap and Adjustable Tailpiece
- Flex Tube Dual Filtered Bypass Diaphragm designed for improved life and reduced maintenance
- Spud Coupling and flange for ¾" Top Spud
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

Fixture Specifications

- Washdown flushing action
- Vandal resistant strainer assembly included
- ¾" I.P.S. top spud inlet
- 2" NPT outlet flange
- All mounting hardware included
- Compliant with Buy American Act when purchased as a combination
- Carrier not included
- 100% factory flush tested
- Complies to the applicable sections of: ANSI/ASME A112.19.2 and CSA B45.1

► Plumbing System Requirements

- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI

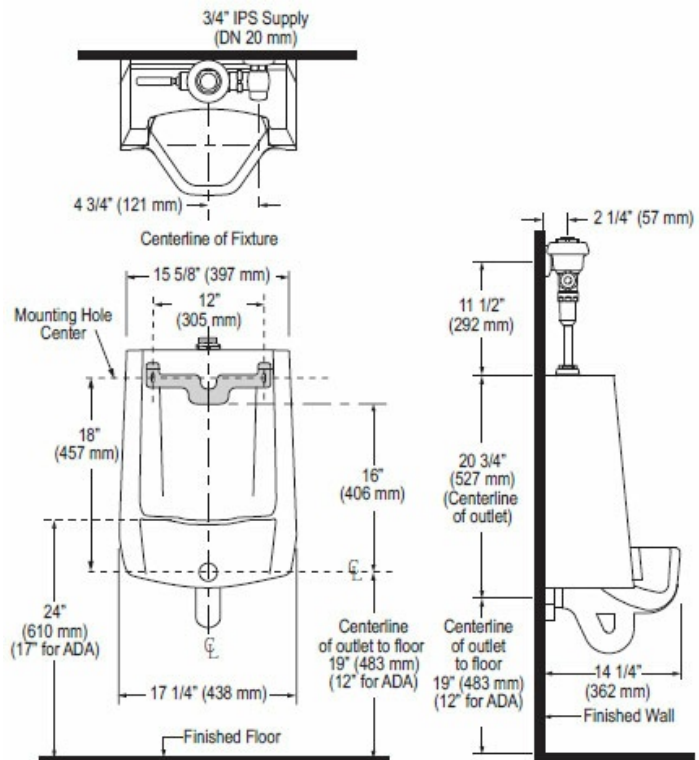

► Disclaimer

All information contained within this document subject to change without notice.

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

► Compliance & Certifications



ASME A112.1.3



This space for Architect/Engineer Approval

