

**Specification: (example)**
**(FOR 1-1/2" BACK INLET CLOSET FIXTURE)**

- Quiet action, TECK® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated body
- **External water conserving flush volume adjustment**, (except -48 and -6 models) factory set to 6 litre (1.6 gal.)
- Vandal resistant cover screw
- Metal "non hold open" handle
- **1" FIP/copper sweat inlet adaptor** angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube and S/S wall flange, spud flange and concealed spud nut
- **Recommended water supply:**  
Minimum flowing pressure – 25 psi (172 kPa)  
Minimum flow rate – 25 gpm (95 L/min)

 **81T271**

As above

 **81T271-1**

Same as 81T271 but with trap seal primer tee

 **81T271-5**

Same as 81T271 but with center cover bumper

 **81T271-6**

Same as 81T271, but **Not Field Adjustable**

 **81T271-48**

Same as 81T271, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**

 **81T271-56**

Same as 81T271-5, but **Not Field Adjustable**

 **81T271-548**

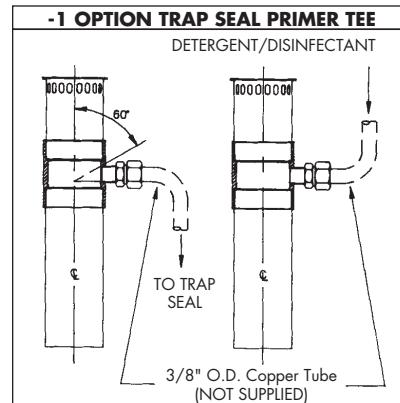
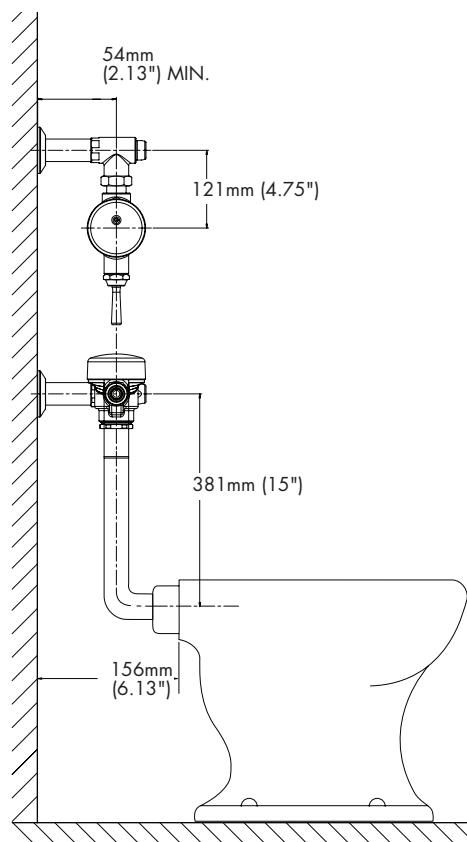
Same as 81T271-5, but factory set to 4.8 litre (1.27 gal.), **Not Field Adjustable**


**Approvals:**

- IAPMO listed to ASSE 1037/ ASME A112.1037/CSA B125.37

- Indicates compliance to ICC/ANSI A117.1

(Contact Delta Representative for State and/or Local Approvals.)


**81T271**

**Engineer/Architect Approval**

Model Specified:

Approval:

Date:

Note: Measurements may vary  $\pm$  6mm (0.25")

Note: For high and low pressure applications, please see page

FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.