

Features

- Brass construction.
- Brass valve bodies.
- Quarter-turn washerless ceramic disc valves.
- Single-hole mounting.
- Right-side lever handle.
- Contemporary styling.
- 8-3/4" (222 mm) high-arch rotating spout.
- 4-7/8" (124 mm) spout reach.
- 1.6 gal/min (6.1 l/min) maximum flow rate.

**ADA** **CSA B651****Codes/Standards**

ASME A112.18.1/CSA B125.1

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes*Color tiles intended for reference only.***Color Code Description**

CP Polished Chrome



G Brushed Chrome



BN Vibrant® Brushed Nickel




VS Vibrant® Stainless



BV Vibrant® Brushed Bronze



BL Matte Black

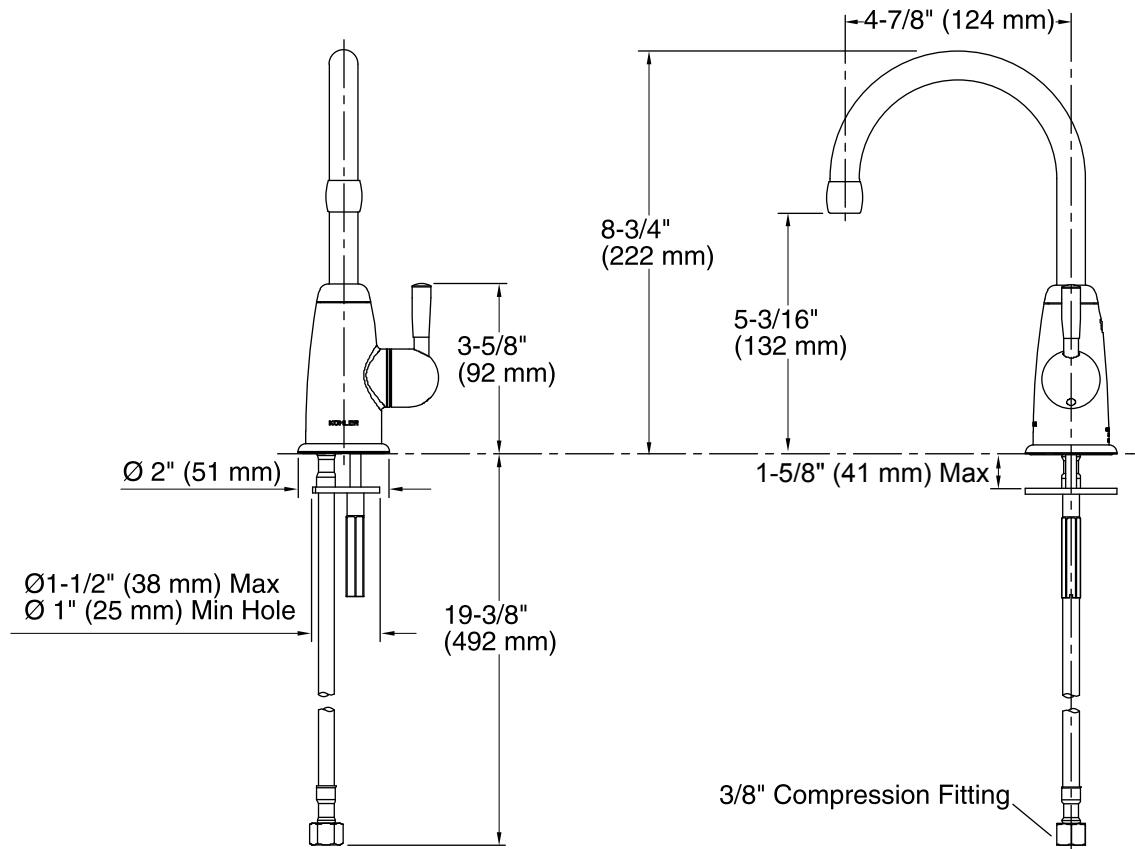

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.6 gal/min (6.1 l/min)

Spout:

Spout reach: 4-7/8" (124 mm)

Notes

Install this product according to the installation guide.

NOTICE: Do not use this product with instant hot water systems or reverse osmosis (RO) filtration systems. Product damage will result.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.