

Cast Deckmount Sink Faucets 4" Centers CER-TECK™

TECK®

DELTA
COMMERCIAL

Specification: (example)

- **HEAVY DUTY CAST BRASS** sink faucet
- 102mm (4") centers, two handle
- Polished chrome plated finish
- CER-TECK 1/4 turn ceramic structures
- **BRASS** swing spout or
3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- Metal hold-down package
- Color indexed metal handles with vandal resistant screws and ...
- with ... Cast Pop-up (if applicable)
- with ... (add spout required)
- with ... (add outlet required)
- with ... (add handle required)

27C4834



27C4233



Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.			
CAST Deckmount LESS Pop-up	27C4			
CAST Deckmount WITH Cast Pop-up	27C5			



SPOUT		OUTLET		HANDLE	
0	<input checked="" type="checkbox"/>	0	<input checked="" type="checkbox"/>	0	<input checked="" type="checkbox"/>
1 203mm (8") Wallform Swing Spout (2)		1	<input type="checkbox"/>	1 Five Flute Handles	
2 203mm (8") Tubular (S5) Swing Spout (2)		2		2 102mm (4") Hooded Blade Handles	
3 152mm (6") Tubular Swing Spout (2)		3		3 76mm (3") Lever Blade Handles	
4	<input type="checkbox"/>	4		4 102mm (4") Blade Handles, Sanitary Hoods	
5	<input type="checkbox"/>	5		5	<input type="checkbox"/>
6	<input type="checkbox"/>	6		6	<input type="checkbox"/>
7	<input type="checkbox"/>	7		7	<input type="checkbox"/>
8 Heavy Duty 114mm (4 1/2") Bend Rigid/Swivel (R2) Gooseneck Spout (1)		8	<input type="checkbox"/>	8	<input type="checkbox"/>
9 Heavy Duty 152mm (6") Bend Rigid/Swivel (R4) Gooseneck Spout (1)		9	<input type="checkbox"/>	9	<input type="checkbox"/>

(1) See Page 9.T.5 for **Optional Rigid/Swivel Spouts**. These spouts can ONLY be added to **SPOUT Option No. 9**.

(2) See Page 9.T.7 for **Optional Swing Spouts**. These spouts can ONLY be added to **SPOUT Option No. 2**.

(3) This outlet can ONLY be added to **SPOUT Option No.'s 8 or 9**.

See current price list for product availability.

Flowrates are at 60 PSI.

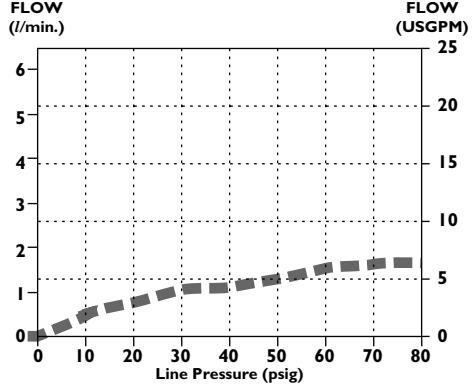
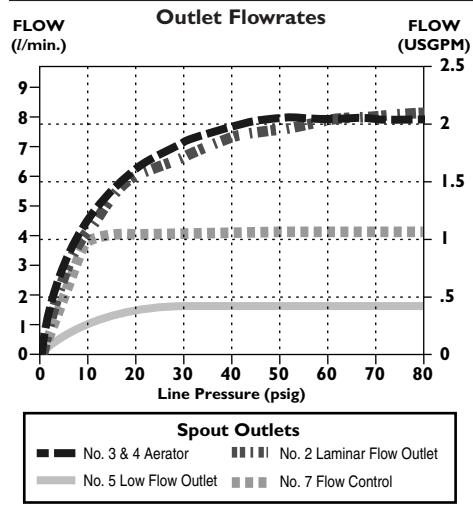
Refer to www.specselectonline.com for individual models.

Note: Use this page front and back as a product submittal sheet.

Approvals:

- CSA certified
- Complies to ASME A112.18.1
- Lever Handle No. 2, 3 and 4 ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force. 
- IAPMO listed
- UL listed to U.S. and Canadian Safety Standards and classified in accordance with ANSI/NSF61-97b 21PL

(Contact Delta Representative for State and/or Local Approvals.)

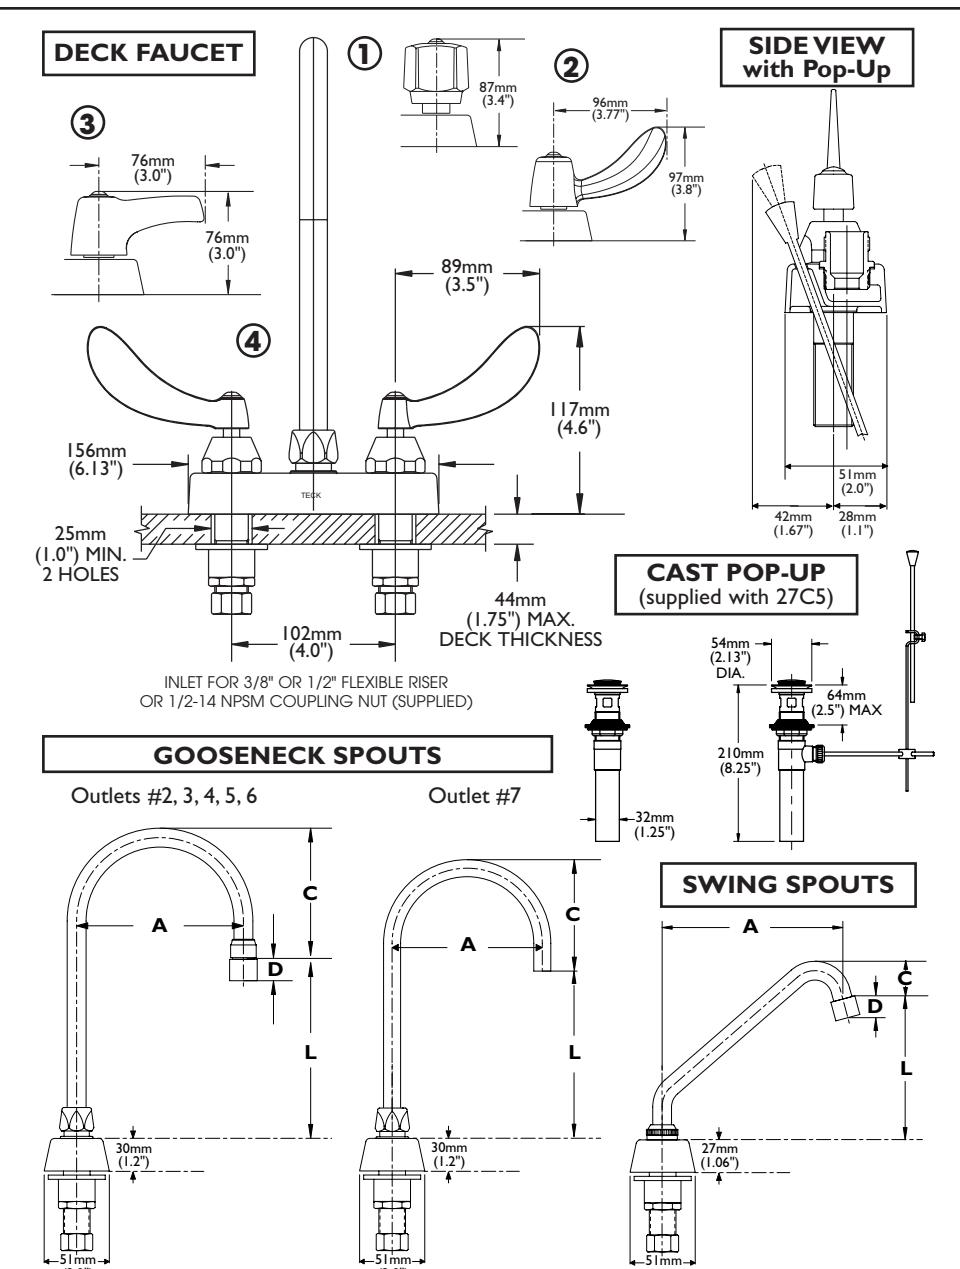
FLOWRATE vs PRESSURE

No. 6 HOSE END OUTLET
GOOSENECK SPOUT ASSEMBLY #8

SPOUT/OUTLET	"A"	"C"	"L"			
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R2) for outlets #2, 3, 4, 5, 6	114	4.5	104	4.1	170	6.7
Gooseneck-Standard (R2) for outlet #7	114	4.5	97	3.8	178	7.0

See Page 9.T.5 for additional optional spouts.

INLETS - 1/2" MIP/Coupling Nuts

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")


GOOSENECK SPOUT ASSEMBLY #9

SPOUT/OUTLET	"A"	"C"	"L"			
	mm	in.	mm	in.	mm	in.
Gooseneck-Standard (R4) for outlets #2, 3, 4, 5, 6	152	6	124	4.9	146	5.8
Gooseneck-Standard (R4) for outlet #7	152	6	117	4.6	152	6.0

SWING SPOUT ASSEMBLIES

Spout No.	Spout Type	"A"	"C"	"L"			
		mm	in.	mm	in.	mm	in.
1	8" Wallform Spout	206	8.1	15	0.6	130	5.1
2	8" Tubular Spout (S5)	185	7.3	41	1.6	147	5.8
3	6" Tubular Spout	140	5.5	38	1.5	107	4.2