



Builder's Best, Inc.
 201 Broiles Drive
 Jacksonville, TX 75766
 903-586-8283
 www.BuildersBest.com
 sales@buildersbest.com

WIRE HELIX ALUMINUM FOIL HOSE WMF661 SilverDuct™



DESCRIPTION

SilverDuct™ is a wire helix hose with a UL® 2158A label for clothes dryer transition duct. SilverDuct™ has steel wire support and a multi-ply design of aluminum, polyester laminate and metalized polyester.

PRODUCT FEATURES

- Steel wire helix duct
- Multi-ply design of aluminum/polyester laminate and metalized polyester
- PRO performance level
- UL® 2158A listed and labeled as foil dryer transition duct

WARNINGS

- UL® approval only for installations of 8 feet or less
- Foil ducts crush easily and may contribute to lint build-up, creating a fire hazard.
- Foil duct is not recommended by Builder's Best as dryer venting
- Check your clothes dryer manufacturer manual as installation may invalidate warranties
- Check local building codes for appropriate use




DISPLAY BOX



PART NUMBERS

Dia.	Length	Clamps	Each #	Qty	Case #	Package
4"	5'		10504	12	110504	Bulk
4"	5'		10504	72	010507	Bulk
4"	5'		10676	6	110676	Display Box
4"	8'		10505	12	110505	Bulk
4"	8'		10505	54	010508	Bulk
4"	8'		10677	6	110677	Display Box
4"	8'		10677	20	010793	Display Box
4"	5'	2 spring	10670	12	110670	bag
4"	8'	2 spring	10671	12	110671	bag
4"	5'	2 ZipTorq™	10672	12	110672	Display Box
4"	8'	2 ZipTorq™	10673	12	110673	Display Box

AIRFLOW

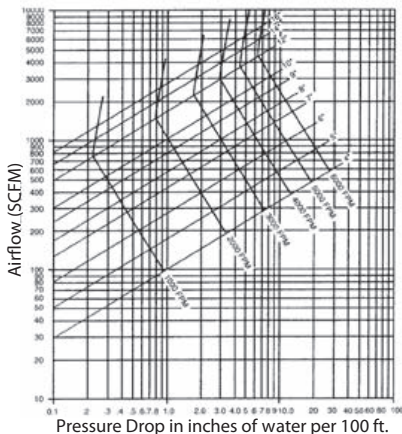

PERFORMANCE DATA

Recommended Operating Pressure:
 6" w.g. positive - all diameters
 Temperature Range: -20°F to +200°F
 Flame Speed: less than 25
 Smoke Developed: less than 50
 Max Velocity: 5000 fpm
 Installation:
 Connections shall be made per installation instructions outlined by the appliance manufacturer and UL® 2158A.

LABELS



WARRANTY

Complete warranty statement at buildersbest.com/warranty