

Ceiling & Floor Heat Pump Ductless System

Indoor Model: D5FCFAH24XAK

Job Data:

Tag #:

Date:

Location:

Carrier#:




INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Four fan speeds
- Capable to be mounted on floor and ceiling
- Turbo Mode
- Active Clean (i-clean)
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

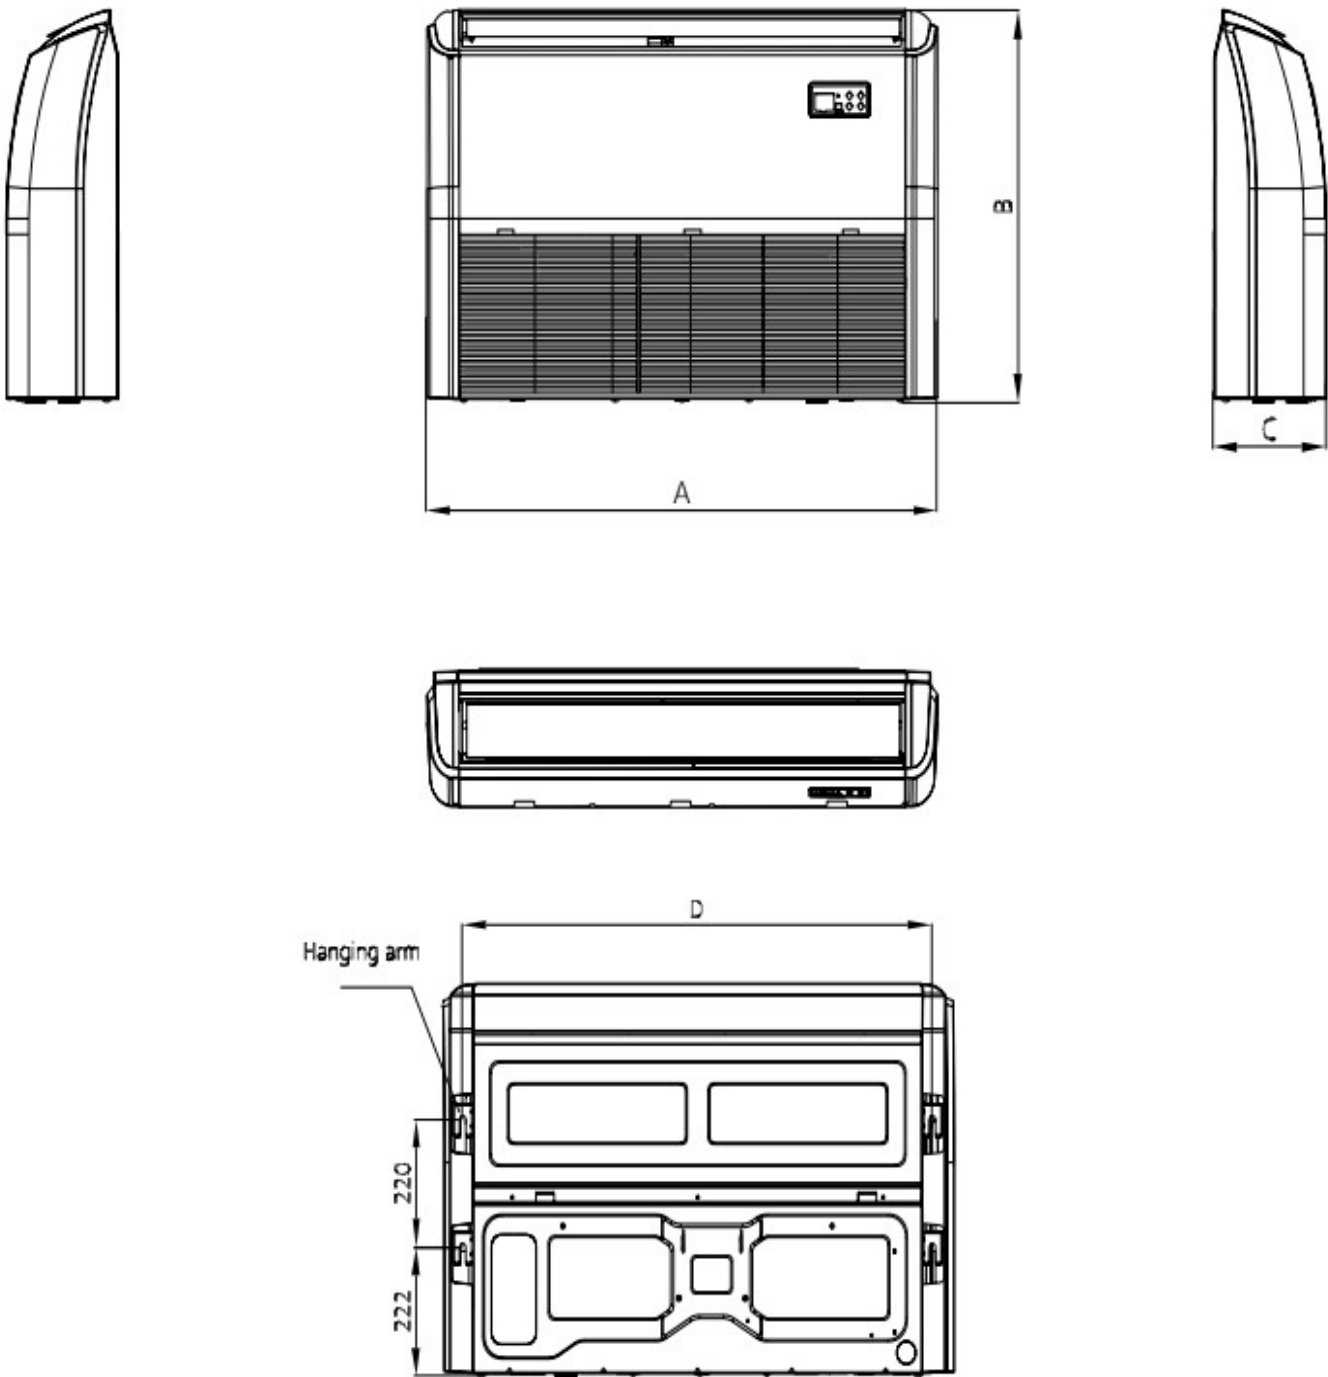

INDOOR UNIT DIMENSIONS					
Capacity	Unit	A	B	C	D
18K/24K	mm	1068	675	235	235
	inch	42.05	26.57	9.25	9.25

D5FCFAH24XAK			
System	Indoor Model #		D5FCFAH24XAK
	Indoor Size		24000
Electrical	Voltage, Phase, Cycle		V/Ph/Hz 208-230/1/60
	Power Supply		Indoor unit powered by outdoor unit
	MCA		A. 3
Operating Range	Cooling Indoor DB Min - Max		°F(°C) 60~90 (16~32)
	Heating Indoor DB Min - Max		°F(°C) 32~86 (0~30)
Indoor Coil	Face Area		Sq. Ft. 2.52
	No. Rows		3
	Fins per inch		20
	Circuits		7
Indoor Unit	Number of Fan Speeds		1200/1075/825
	Airflow (highest to lowest)	CFM	735.75 / 706.32 / 606.26 / 453.22 / 376.70
	Sound Pressure (highest to lowest)	dB(A)	51.5/49.0/45.0/34.0/29.0
	Moisture Removal	L/h	1.73
	Air Throw Data		ft(m)
Dimensions	Height	in (mm)	9.25(235)
	Width	in (mm)	42.05(1068)
	Depth	in (mm)	26.57(675)
	Net Weight	lbs (kg)	61.29(27.8)
	Shipping Height	in (mm)	12.13(308)
	Shipping Width	in (mm)	45.47(1155)
	Shipping Depth	in (mm)	29.92(760)
	Shipping Net Weight	lbs (kg)	73.19(33.2)
CONTROLS			
Standard	Wireless Remote Controller (°F/°C Convertible)		
Optional	Wired Remote Control 7 Day Programmable		KSACN1401AAA
	Wired Remote Control with Timer Function		KSACN1201AAA
	24V Mini Interface		KSAIC0601230



R-454B