

Ceiling & Floor Heat Pump Ductless System



Indoor Model:

D5FCFAH36XAK

Job Dat:
 Tag #:
 Date:

Location:
 Carrier#:




INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Four fan speeds
- Capable to be mounted on floor and ceiling
- Turbo Mode
- Active Clean (i-clean)
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating

RESIDENTIAL APPLICATION LIMITED WARRANTY*

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

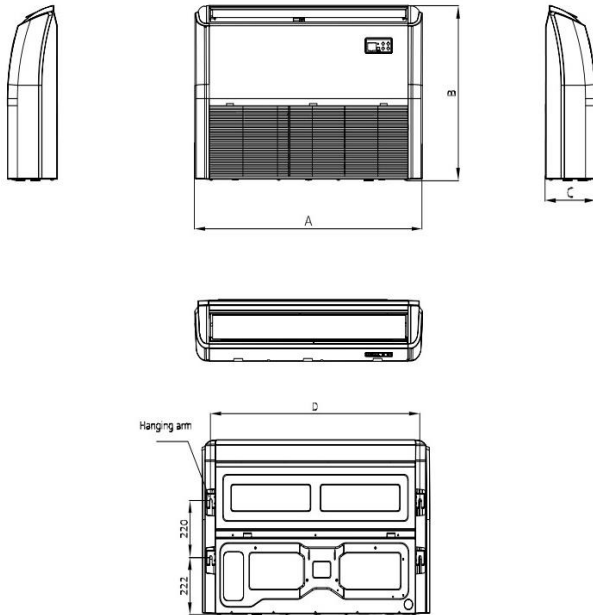

INDOOR UNIT DIMENSIONS				
Capacity	Unit	W	D	H
36K ~ 60K	in(mm)	64.96(1650)	26.57(675)	9.25(235)

Indoor - Heat Pump			
System	Indoor Model #	D5FCFAH36XAK	
	Indoor Size	36000	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208-230/1/60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	3
Operating Range	Cooling Indoor DB Min - Max	*F(*C)	60~90(16~32)
	Heating Indoor DB Min - Max	*F(*C)	32~86(0~30)
Indoor Coil	Face Area	Sq. Ft.	4.11
	No. Rows		3
	Fins per inch		20
	Circuits		8
Indoor Unit	Number of Fan Speeds		1120/1040/880
	Airflow (highest to lowest)	CFM	1224.29 / 1088.91 / 988.85 / 765.18 / 653.35
	Sound Pressure (highest to lowest)	dB(A)	N/A/51.0/45.5/39.0/35.0
	Moisture Removal	L/h	3.1
Dimensions	Body Height	in (mm)	9.25(235)
	Body Width	in (mm)	64.96(1650)
	Body Depth	in (mm)	26.57(675)
	Body Net Weight	lbs (kg)	87.74(39.8)
	Shipping Height	in (mm)	12.13(308)
	Shipping Width	in (mm)	68.31(1735)
	Shipping Depth	in (mm)	29.92(760)
	Shipping Net Weight	lbs (kg)	102.29(46.4)

Accessories		
Standard	Wireless Remote Controller (*F/*C Convertible)	
Optional	Wired Remote Control 7 Day Programmable	KSACN1401AAA
	Wired Remote Control with Timer Function	KSACN1201AAA
	24V Mini Interface	KSAIC0601230



R-454B



R-454B



R-454B