

Ceiling & Floor Heat Pump Ductless System

Indoor Model: D5FCFAH48XAK



Job Dat

Location:

Tag #:

Carrier#:

Date:




- INDOOR STANDARD FEATURES**
- Modes: Cool, Heat, Dry, Fan, Auto
  - Four fan speeds
  - Capable to be mounted on floor and ceiling
  - Turbo Mode
  - Active Clean (i-clean)
  - Follow Me (senses temperature at handheld remote)
  - Auto-Restart function
  - Quiet indoor operation
  - Anti-corrosive fin coating

**RESIDENTIAL APPLICATION LIMITED WARRANTY\***

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

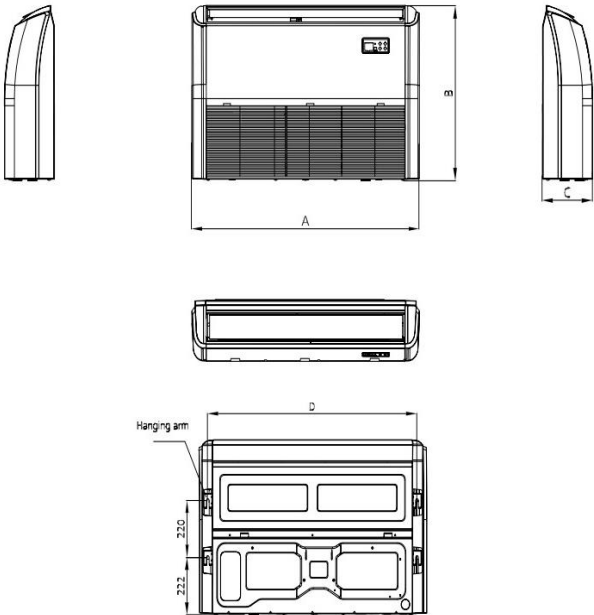

| INDOOR UNIT DIMENSIONS |        |             |            |           |
|------------------------|--------|-------------|------------|-----------|
| Capacity               | Unit   | W           | D          | H         |
| 36K ~ 60K              | in(mm) | 64.96(1650) | 26.57(675) | 9.25(235) |

| Indoor - Heat Pump |                                    |                                     |                                               |
|--------------------|------------------------------------|-------------------------------------|-----------------------------------------------|
| System             | Indoor Model #                     | D5FCFAH48XAK                        |                                               |
|                    | Indoor Size                        | 48000                               |                                               |
| Electrical         | Voltage, Phase, Cycle              | V/Ph/Hz                             | 208-230/1/60                                  |
|                    | Power Supply                       | Indoor unit powered by outdoor unit |                                               |
|                    | MCA                                | A.                                  | 3                                             |
| Operating Range    | Cooling Indoor DB Min - Max        | *F(*C)                              | 60~90(16~32)                                  |
|                    | Heating Indoor DB Min - Max        | *F(*C)                              | 32~86(0~30)                                   |
| Indoor Coil        | Face Area                          | Sq. Ft.                             | 4.11                                          |
|                    | No. Rows                           |                                     | 3                                             |
|                    | Fins per inch                      |                                     | 20                                            |
|                    | Circuits                           |                                     | 8                                             |
| Indoor Unit        | Number of Fan Speeds               |                                     | 1210/1120/940                                 |
|                    | Airflow (highest to lowest)        | CFM                                 | 1353.78 / 1236.06 / 1083.02 / 800.50 / 665.12 |
|                    | Sound Pressure (highest to lowest) | dB(A)                               | 54/53.0/48.5/39/35                            |
|                    | Moisture Removal                   | L/h                                 | 6.32                                          |
| Dimensions         | Body Height                        | in (mm)                             | 9.25(235)                                     |
|                    | Body Width                         | in (mm)                             | 64.96(1650)                                   |
|                    | Body Depth                         | in (mm)                             | 26.57(675)                                    |
|                    | Body Net Weight                    | lbs (kg)                            | 89.07(40.4)                                   |
|                    | Shipping Height                    | in (mm)                             | 12.13(308)                                    |
|                    | Shipping Width                     | in (mm)                             | 68.31(1735)                                   |
|                    | Shipping Depth                     | in (mm)                             | 29.92(760)                                    |
|                    | Shipping Net Weight                | lbs (kg)                            | 105.16(47.7)                                  |

| Accessories |                                                |              |
|-------------|------------------------------------------------|--------------|
| Standard    | Wireless Remote Controller (*F/*C Convertible) |              |
| Optional    | Wired Remote Control 7 Day Programmable        | KSACN1401AAA |
|             | Wired Remote Control with Timer Function       | KSACN1201AAA |
|             | 24V Mini Interface                             | KSAIC0601230 |



R-454B



**R-454B**



**R-454B**