

4-Way Cassette Heat Pump Ductless System

Indoor Model: D5FSCAH12XAK


Job Data:

Tag #:

Date:

Location:

Carrier#:

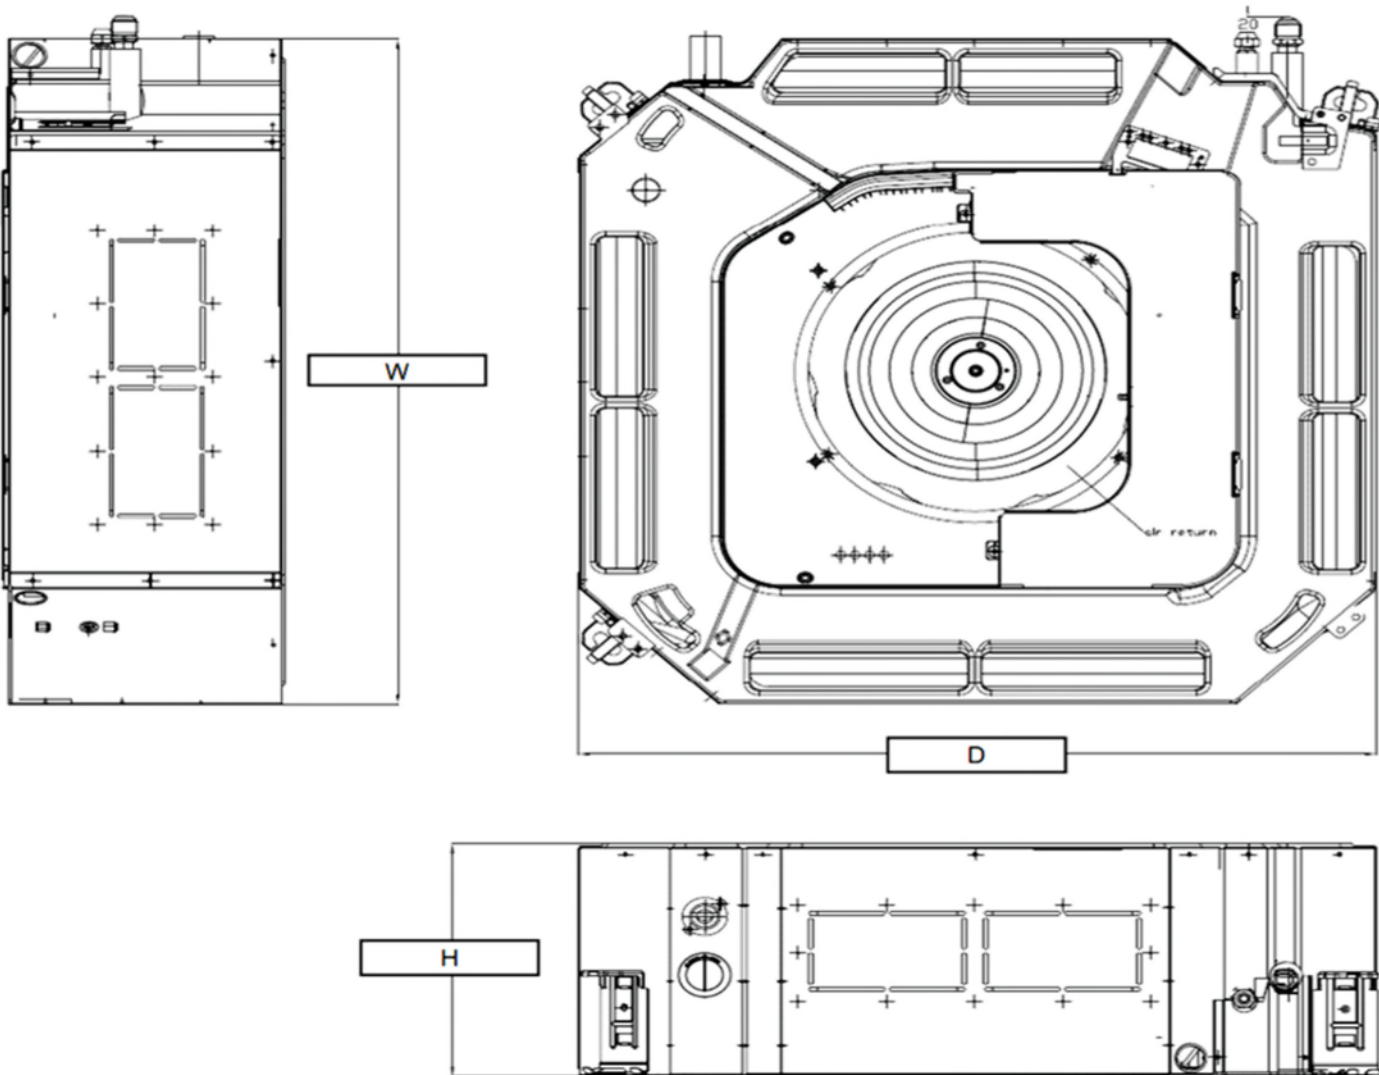

| INDOOR UNIT DIMENSIONS |      |       |       |      |
|------------------------|------|-------|-------|------|
| Capacity               | Unit | W     | D     | H    |
| 12K/18K                | mm   | 570   | 570   | 245  |
|                        | inch | 22.44 | 22.44 | 9.65 |
| 24K                    | mm   | 830   | 830   | 205  |
|                        | inch | 32.68 | 32.68 | 8.07 |



INDOOR STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Outside Air Intake
- Four fan speeds
- Sleep Mode
- Built-in condensate lift pump
- Follow Me (senses temperature at handheld remote)
- Auto-Restart function
- Quiet indoor operation
- Anti-corrosive fin coating
- Ceiling Grille

RESIDENTIAL APPLICATION LIMITED WARRANTY\*

- Ten (10) years if properly registered within ninety (90) days after original installation, parts are warranted to the original purchaser for a period of ten (10) years. Otherwise, parts warranty is five (5) years.

NOTE: Images for illustration purposes only. Actual models may be slightly different.

| D5FSCAH12XAK    |                                                |                                     |                      |
|-----------------|------------------------------------------------|-------------------------------------|----------------------|
| System          | Indoor Model #                                 |                                     | D5FSCAH12XAK         |
|                 | Indoor Size                                    |                                     | 12000                |
| Electrical      | Voltage, Phase, Cycle                          | V/Ph/Hz                             | 208-230/1/60         |
|                 | Power Supply                                   | Indoor unit powered by outdoor unit |                      |
|                 | MCA                                            | A.                                  | 3                    |
| Operating Range | Cooling Indoor DB Min - Max                    | °F(°C)                              | 60~90 (16~32)        |
|                 | Heating Indoor DB Min - Max                    | °F(°C)                              | 32~86 (0~30)         |
| Indoor Coil     | Face Area                                      | Sq. Ft.                             | 2.95                 |
|                 | No. Rows                                       |                                     | 2                    |
|                 | Fins per inch                                  |                                     | 20                   |
|                 | Circuits                                       |                                     | 4                    |
| Indoor Unit     | Number of Fan Speeds                           |                                     | 700/600/400          |
|                 | Airflow (highest to lowest)                    | CFM                                 | 364.92/306.06/194.23 |
|                 | Sound Pressure (highest to lowest)             | dB(A)                               | 43.5/40.5/27.5/26.0  |
|                 | Moisture Removal                               | L/h                                 | 1.45                 |
|                 | Air Throw Data                                 | ft(m)                               | 9.84(3)              |
| Dimensions      | Body Height                                    | in (mm)                             | 9.65(245)            |
|                 | Body Width                                     | in (mm)                             | 22.44(570)           |
|                 | Body Depth                                     | in (mm)                             | 22.44(570)           |
|                 | Body Net Weight                                | lbs (kg)                            | 35.27(16)            |
|                 | Panel Height                                   | in (mm)                             | 1.969(50)            |
|                 | Panel Width                                    | in (mm)                             | 24.406(620)          |
|                 | Panel Depth                                    | in (mm)                             | 24.406(620)          |
|                 | Shipping Height                                | in (mm)                             | 11.61(295)           |
|                 | Shipping Width                                 | in (mm)                             | 28.15(715)           |
|                 | Shipping Depth                                 | in (mm)                             | 25.20(640)           |
|                 | Shipping Net Weight                            | lbs (kg)                            | 41.89(19)            |
| CONTROLS        |                                                |                                     |                      |
| Standard        | Wireless Remote Controller (°F/°C Convertible) |                                     |                      |
| Required        | Cassette Panel                                 |                                     | KSALG0103AAA         |
| Optional        | Wired Remote Control 7 Day Programmable        |                                     | KSACN1401AAA         |
|                 | Wired Remote Control with Timer Function       |                                     | KSACN1201AAA         |
|                 | Wi-Fi™ Kit High Wall                           |                                     | KSAIF0701AAA         |
|                 | 24V Mini Interface                             |                                     | KSAIC0601230         |



R-454B