



H-7x70XL - Magnetic Boiler Filter XL

H-7x70XL Series

Magnetic Boiler Filter XL

12,000 Gauss Magnet


Integrated Hose Drain Valve, Air Vent & Filter

Includes (2) Union End Connections & Service Tool






Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C		
FIP								145 PSI CWP Max	250°F Max
1 1/4"	H-74705	5.62	1	4	8.80	9.37	1.75		
1 1/2"	H-74706	5.84	1	4	8.90	9.37	1.75		
MIP								145 PSI CWP Max	250°F Max
1 1/4"	H-72705	5.67	1	4	9.20	9.37	1.75		
1 1/2"	H-72706	5.86	1	4	9.30	9.37	1.75		
Press								145 PSI CWP Max	250°F Max
1 1/4"	H-78705	5.66	1	4	10.00	9.37	1.75		
1 1/2"	H-78706	6.19	1	4	11.10	9.37	1.75		
SWT								145 PSI CWP Max	250°F Max
1 1/4"	H-75705	5.09	1	4	7.50	9.37	1.75		
1 1/2"	H-75706	5.54	1	4	9.50	9.37	1.75		



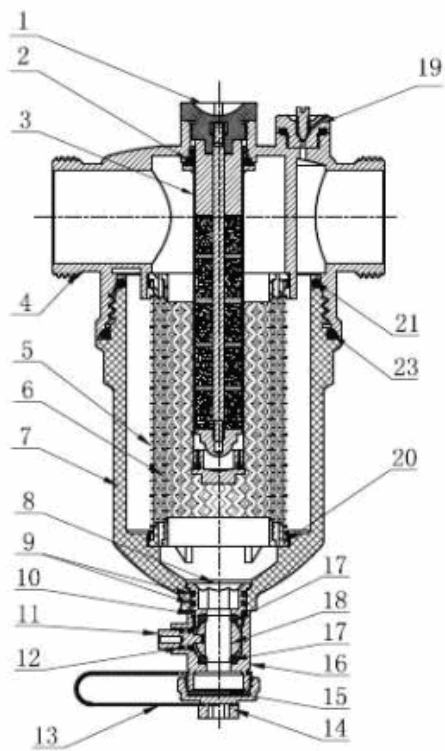

NO.	DESCRIPTION	MATERIAL
1	Magnet Bar	Various
2	O-ring	Rubber
3	Magnet Sleeve	Nickel Plated Brass
4	Body Upper Half	Brass
5	Outer Screen	Stainless Steel
6	Inner Screen	Stainless Steel
7	Body Lower Half	Plastic
8	Valve Cap	Brass
9	O-Ring	Rubber
10	O-Ring	Rubber
11	Valve Stem	Brass
12	O-Ring	Rubber
13	Strap	Rubber
14	Hose Cap	Brass
15	Gasket	Rubber
16	Valve Body	Brass
17	Valve Seat	Teflon
18	Valve Ball	Brass HCP
19	Vent Assembly	Various
20	Screen Guide	Plastic
21	O-Ring	Rubber
22	Service Tool	Plastic
23	O-Ring	Rubber

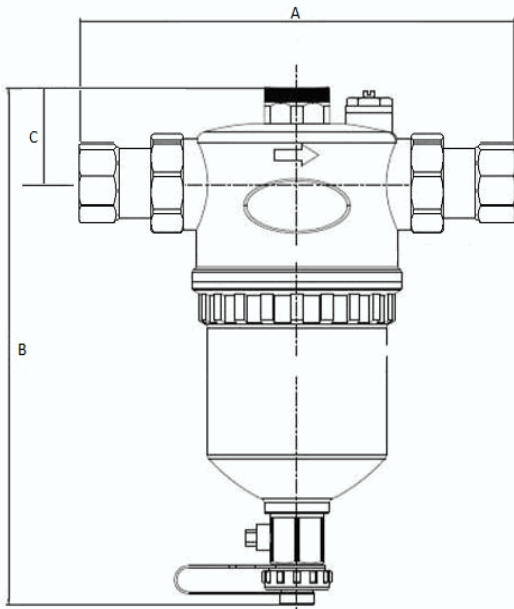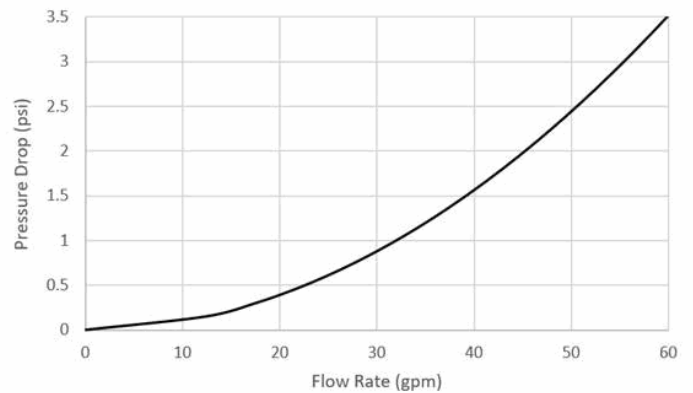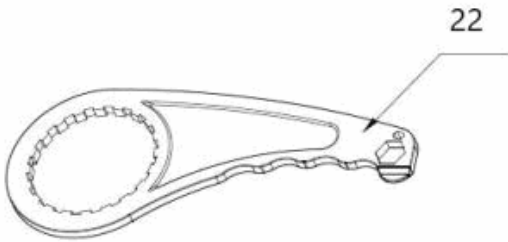

Specifications: Designed for use with in residential or commercial systems. Ensure 5.5" of clearance above the unit so that the magnetic bar may be removed for service. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends.

REV:9/24/2024

LEAD-FREE: Weighted
average lead content $\leq 0.25\%$

WWW.WEBSTONEVALVES.COM



WARNING: Cancer and Reproductive
Harm - www.P65Warnings.ca.gov