



H-7x70 - Magnetic Boiler Filters

H-7x70 Series

Magnetic Boiler Filter

12,000 Gauss Magnet, Diverter

Integrated Hose Drain Valve, Air Vent & Filter

Includes (2) Union End Connections & Service Tool





Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	175 PSI CWP Max	250°F Max
FIP							
3/4"	H-74703	2.52	1	4	7.12		
1"	H-74704	2.52	1	4	7.20		
MIP						175 PSI CWP Max	250°F Max
3/4"	H-72703	2.52	1	4	6.80		
1"	H-72704	2.52	1	4	6.92		
Press						175 PSI CWP Max	250°F Max
3/4"	H-78703	2.52	1	4	8.66		
1"	H-78704	2.52	1	4	8.66		
SWT						175 PSI CWP Max	250°F Max
3/4"	H-75703	2.52	1	4	7.08		
1"	H-75704	2.52	1	4	7.42		

REV:9/24/2024



LEAD-FREE: Weighted
average lead content ≤ 0.25%

WWW.WEBSTONEVALVES.COM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

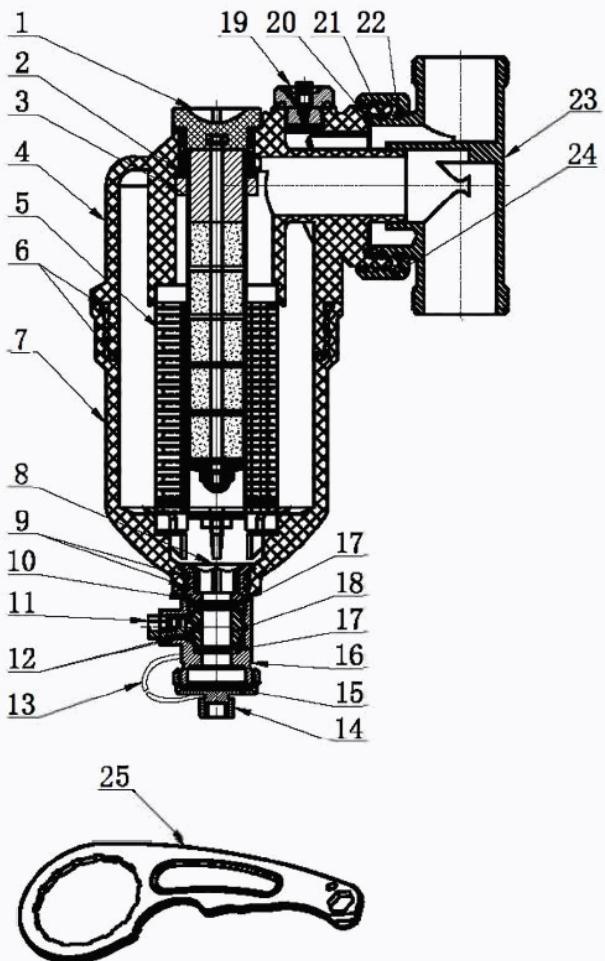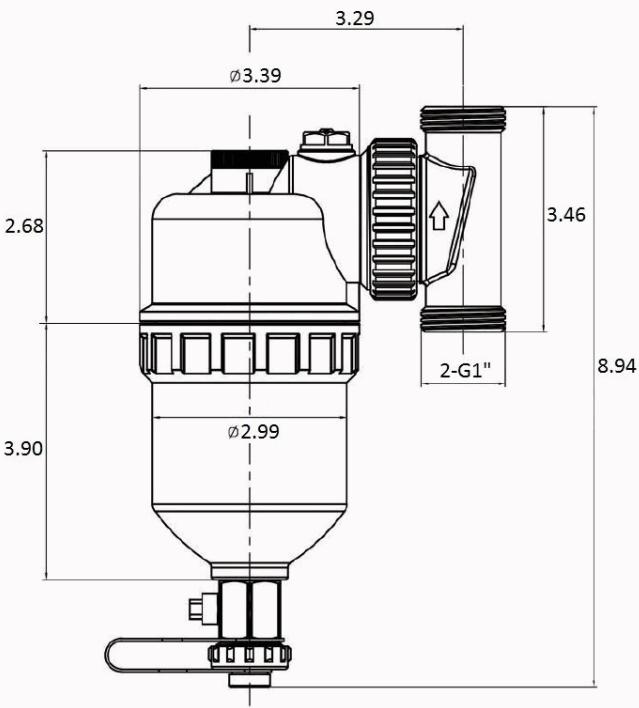

NO.	DESCRIPTION	MATERIAL
1	Magnet Bar	Various
2	O-Ring	Rubber
3	Magnet Sleeve	Nickel Plated Brass
4	Body Upper Half	Plastic
5	Plastic Screen Filter	Plastic
6	O-Ring	Rubber
7	Body Lower Half	Plastic
8	Valve Cap	Brass
9	O-Ring	Rubber
10	Drainer	Brass
11	Valve Stem	Brass
12	Drainer	Brass
13	Strap	Rubber
14	Cap	Brass
15	Gasket	Rubber
16	Drainer	Brass
17	Valve Ball Seat	Teflon
18	Valve Ball	Brass
19	Vent Assembly	Brass
20	O-Ring	Rubber
21	O-Ring	Rubber
22	Diverter Clip Ring	Stainless Steel
23	Diverter	Brass
24	Diverter Nut	Brass
25	Service Tool	Plastic

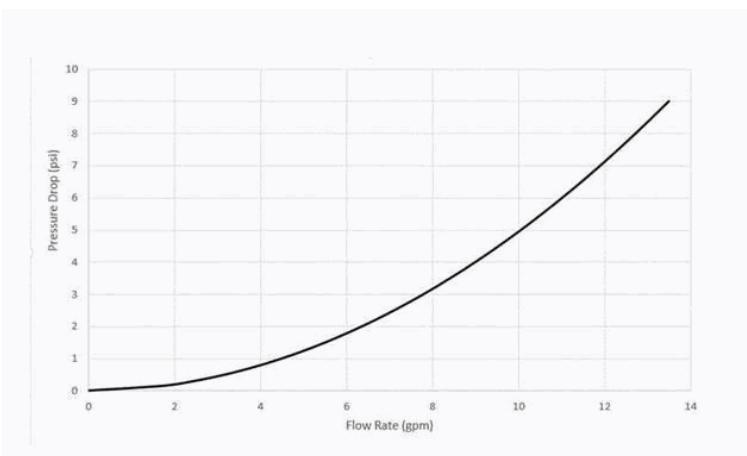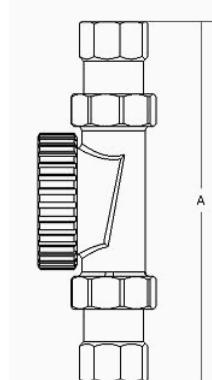

Specifications: Designed for use with water, oil, glycol mix in residential or commercial heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends.

REV:9/24/2024

LEAD-FREE: Weighted
average lead content ≤ 0.25%

WWW.WEBSTONEVALVES.COM

⚠️ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

NO.	DESCRIPTION	MATERIAL
1	Magnet Bar	Various
2	O-Ring	Rubber
3	Magnet Sleeve	Nickel Plated Brass
4	Body Upper Half	Plastic
5	Plastic Screen Filter	Plastic
6	O-Ring	Rubber
7	Body Lower Half	Plastic
8	Valve Cap	Brass
9	O-Ring	Rubber
10	Drainer	Brass
11	Valve Stem	Brass
12	Drainer	Brass
13	Strap	Rubber
14	Cap	Brass
15	Gasket	Rubber
16	Drainer	Brass
17	Valve Ball Seat	Teflon
18	Valve Ball	Brass
19	Vent Assembly	Brass
20	O-Ring	Rubber
21	O-Ring	Rubber
22	Divertor Clip Ring	Stainless Steel
23	Divertor	Brass
24	Divertor Nut	Brass
25	Service Tool	Plastic

Specifications: Designed for use with water, oil, glycol mix in residential or commercial heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends.

REV:9/24/2024

LEAD-FREE: Weighted
average lead content ≤ 0.25%

WWW.WEBSTONEVALVES.COM

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov