

**Features**

- Durable swirl gloss finish.
- 1/2" (13 mm) threshold with 1/2" (13mm) finished floor.
- 39-3/8" (1000 mm) x 39-3/8" (1000 mm) base finished dimensions.

**Material**

- Compression molded from our exclusive Vikrell® material.

**Installation**

- Suitable for tile down application or with STERLING wall surround.

**ADA****Codes/Standards**

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

Greenguard UL 2818 - Gold

ADA

**Warranty – Bathing Fixtures (and)  
Kitchen and Utility Sinks Made of Solid  
Vikrell® Material**



See website for detailed warranty information.

**Available Color/Finishes***Color tiles intended for reference only.***Color    Code    Description**

0    White



96    KOHLER Biscuit

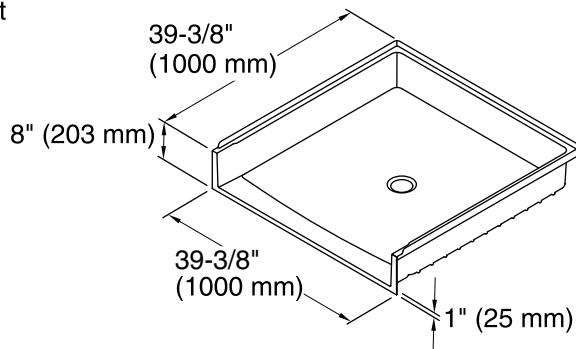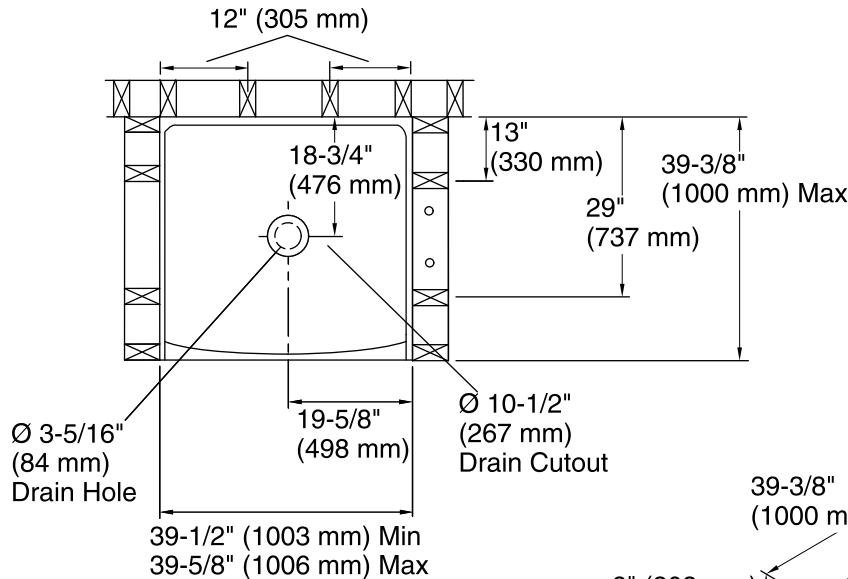

## Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Center

Minimum flat for door: 3-1/8" (80 mm)

Threshold height: 1/2" (13 mm)

## Notes

Install this product according to the installation instructions.

1/2" minimum finished floor thickness required.

Studs should be positioned roughly as shown.

Drain cutout in subfloor to be 10-1/2" (267 mm) per rough-in illustration as shown to allow the backside of the drain to sit below the subfloor surface.

ADA compliant when installed to the specific requirements of these regulations.