

### Features

- Engineered for optimal performance with KOHLER toilets.
- Fixture-mount design.

### Material

- Durable brass construction.
- Chloramine resistance on all rubber components exposed to waterway.

### Technology

- Non-hold open piston technology for accurate activation.

### Installation

- Intended for toilet installations with 1-1/2" top spud coupling connection.
- Includes vacuum breaker and control stop.
- Self-cleaning brass piston prevents clogging and reduces maintenance.



**ADA** **CSA B651** **OBC**

### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color   Code   Description

 CP   Polished Chrome

\*10-3/4" (273 mm) minimum with a 6" (152 mm) critical level above the fixture

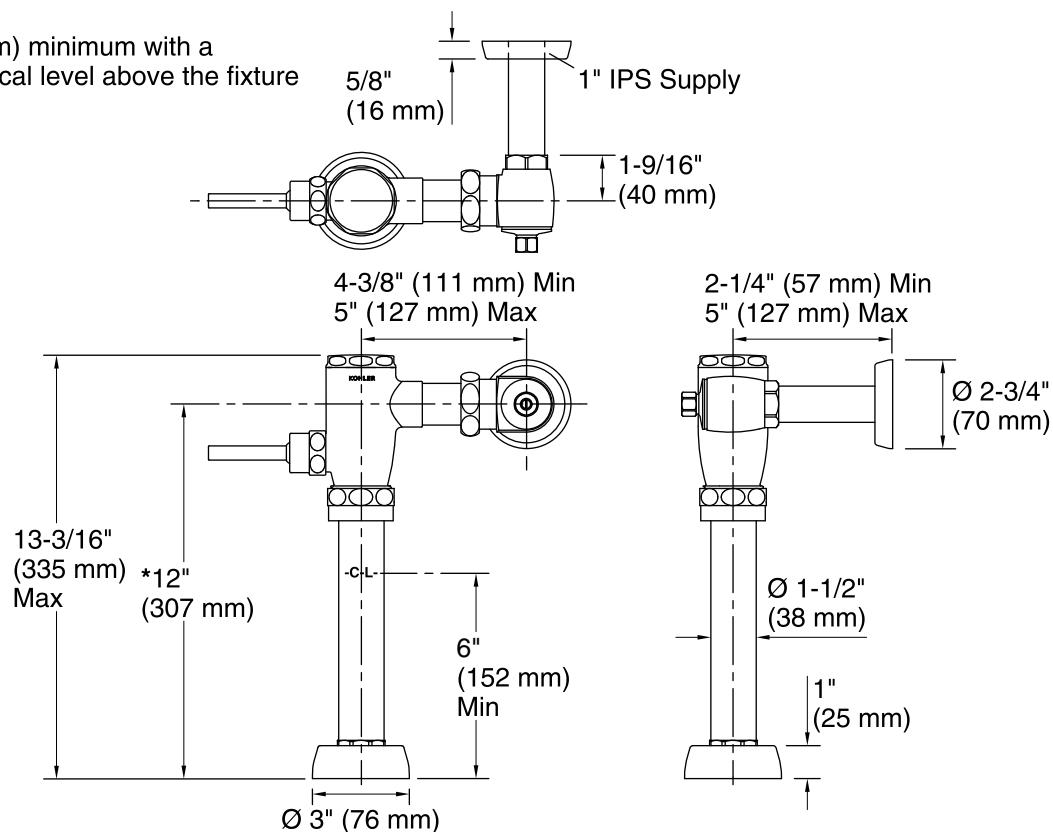

### Technical Information

All product dimensions are nominal.

Fixture pressure max 80 psi (551.6 kPa)  
(static):

### Pressure and Supply Requirements

Fixture pressure min 35 psi (241.3 kPa)  
(static):

### Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)

Max static pressure: 80 psi (551.6 kPa)

Min flowing pressure: 25 psi (172.4 kPa)

Min flow rate: 25 gpm (94.6 lpm)

### Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.