


**Engineering Specifications: Zurn AquaSpec® Z831B4-XL-ICT**

Polished chrome-plated 8" [203mm] widespread with an 5-3/8" [137mm] centerline rigid or swing gooseneck spout and quarter turn ceramic disc cartridges. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4" [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/8" [29mm] thick.

Zurn Lead Compliant\* "XL" products are a line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn "XL" products are manufactured with \*not more than 0.25% lead content when used with respect to wetted surfaces of pipes and pipe fittings, plumbing fitting and fixtures: California Health & Safety Code § 116875; Vermont 9 VCA § 2470h

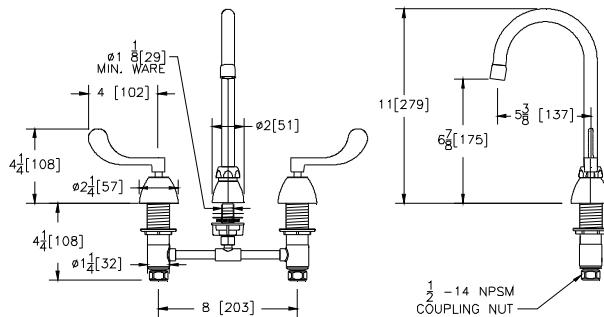

Note: All dimensions are for reference only. Do not use for pre-plumbing

**OPTIONAL ACCESSORIES**

<b>Suffix</b>	<b>Description</b>
<input type="checkbox"/> -85	85° Restricted Swing Spout
<input type="checkbox"/> -CWO	Cold Water Only
<input type="checkbox"/> -FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
<input type="checkbox"/> -HS	Hose and Spray
<input type="checkbox"/> -G	1-1/4" [32mm] Grid Strainer Drain
<input type="checkbox"/> -GH	Offset Handicap Grid Drain
<input type="checkbox"/> -HCT	Hot/Cold Text Indexes
<input type="checkbox"/> -P	1-1/4" [32mm] Pop-up Drain
<input type="checkbox"/> -PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
<input type="checkbox"/> -TW	Third Waterway
<input type="checkbox"/> -140	140° Restricted Swing Spout
<input type="checkbox"/> -2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
<input type="checkbox"/> -3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
<input type="checkbox"/> -4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
<input type="checkbox"/> -5F	2.0 GPM [8.3 L] Rosette Spray
<input type="checkbox"/> -7F	1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
<input type="checkbox"/> -16F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
<input type="checkbox"/> -17F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
<input type="checkbox"/> -18F	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
<input type="checkbox"/> -19F	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
<input type="checkbox"/> -21F	1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet
<input type="checkbox"/> -22F	1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet
<input type="checkbox"/> -23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator
<input type="checkbox"/> -24F	0.35 GPM [1.3 L] Pressure Compensating Female Spray Outlet
<input type="checkbox"/> -25F	0.35 GPM [1.3 L] Vandal-Resistant Pressure Compensating Female Spray Outlet

**ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330**

**Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: [www.zurn.com](http://www.zurn.com)**

**In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292**