

Features

- Single cylinder handle allows for both volume and temperature control
- 4" (102 mm) spout reach.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Includes metal pop-up drain with 1-1/4" tailpiece.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Toobi faucets, accessories, and showering components to complete your bathroom.

**Material**

- Premium Metal Construction
- KOHLER finishes resist corrosion and tarnishing

Installation

- For single-hole installation.
- Pre-attached flexible supply lines simplify installation

ADA **CSA B651****Codes/Standards**


- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61
- NSF/ANSI 372
- All applicable US Federal and State material regulations
- DOE - Energy Policy Act 1992
- EPA WaterSense®
- California Energy Commission (CEC)
- ADA
- ICC/ANSI A117.1
- CSA B651

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes*Color tiles intended for reference only.***Color Code Description**

CP	Polished Chrome
BN	Vibrant® Brushed Nickel

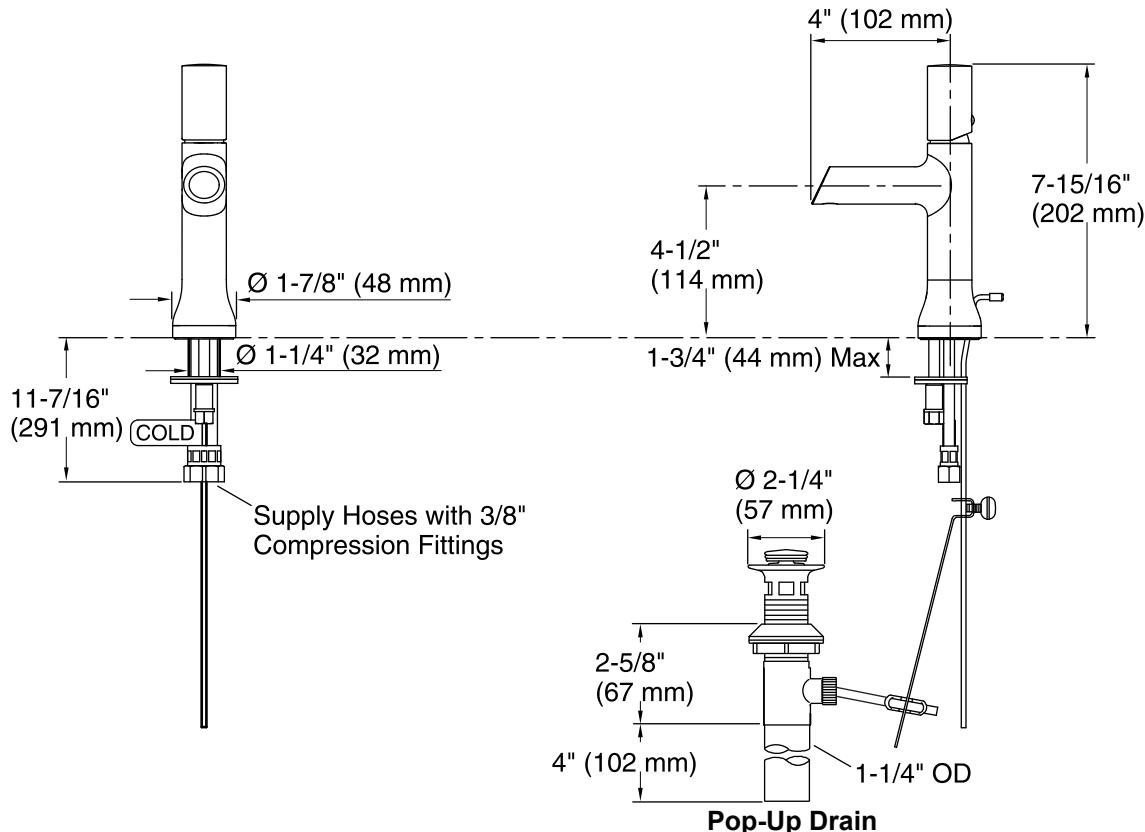

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)
Pressure: 60 psi (4.1 bar)

Drain included: Yes
Drain tailpiece included: Yes

Spout:

Spout reach: 4" (102 mm)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.