

**Features**

- Compression molded from our exclusive Vikrell® material.
- Modular design allows it to be moved around corners and through doorways with ease.
- Durable swirl gloss finish.
- Wall surround includes backer boards for grab bar installation.
- 1/2" (13 mm) threshold with 1/2" (13 mm) finished floor.
- 63-1/4" (1607 mm) x 39-3/8" (1000 mm) x 72" (1829 mm) complete unit finished dimensions.

**Installation**

- Tongue-and-groove four piece modular design allows for easy snap together installation.
- Caulk required for proper installation.

**Components**

Product includes:

- 62065106 63" Shower End Wall Set w/Backer Boards
- 62061100 63" Shower Base
- 62062106 63" Shower Back Wall w/Backer Boards

**Codes/Standards**

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- Greenguard UL 2818 - Gold
- HUD, UM Bulletin 73
- CARB P2

**STERLING® Warranty - Fixtures Made of Solid Vikrell Material**


See website for detailed warranty information.

**Available Color/Finishes**

*Color tiles intended for reference only.*

**Color   Code   Description**

0	White
96	KOHLER Biscuit

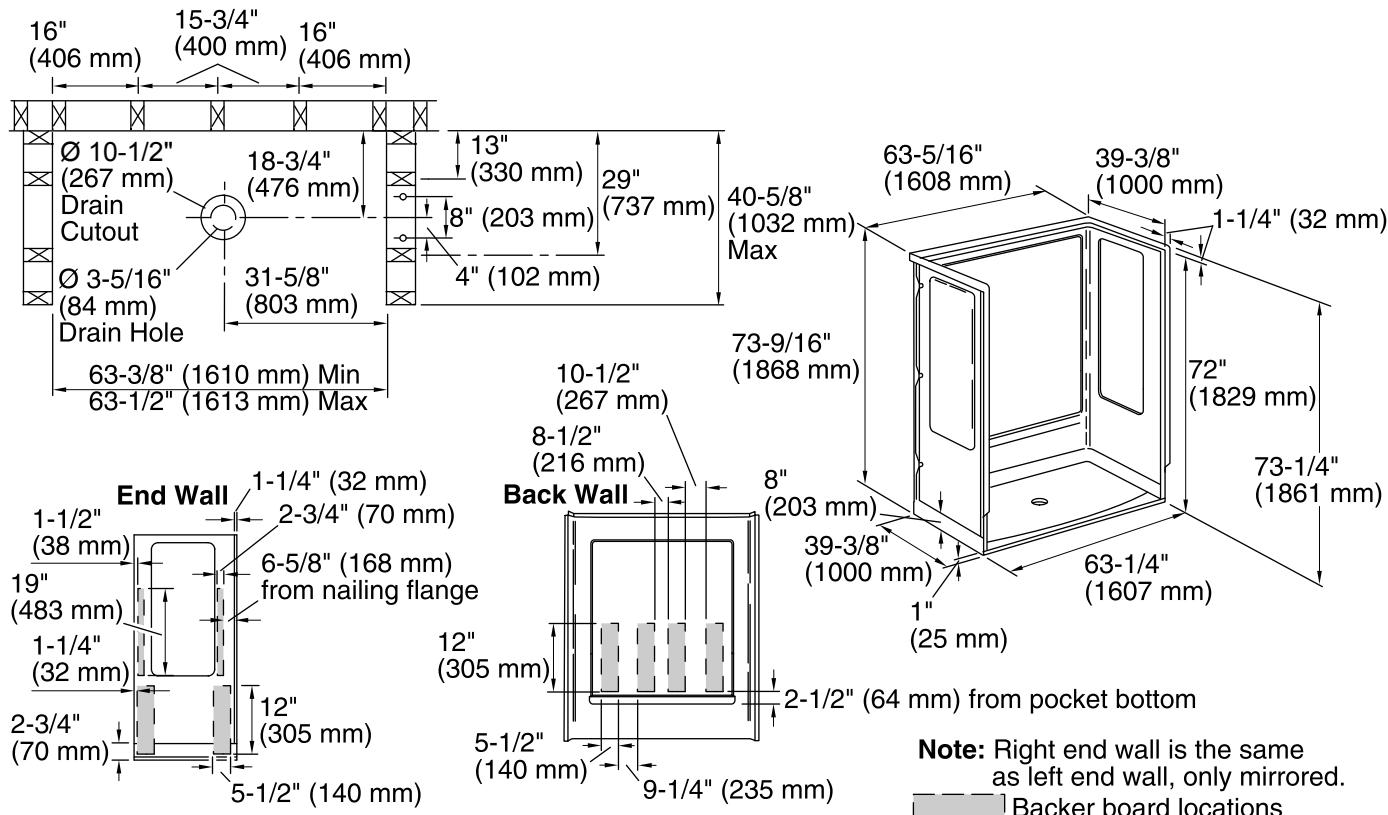

## Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Center

Minimum flat for door: 2-1/2" (64 mm)

Threshold height: 1/2" (13 mm)

## Notes

Install this product according to the installation instructions.

Attach grab bars at the specified backer board locations only.

1/2" minimum finished floor thickness required.

Studs should be positioned as shown.

Drain cutout in subfloor to be 10-1/2" (267 mm) per rough-in illustration as shown to allow the backside of the drain to sit below the subfloor surface.

Backer boards and fasteners protrude beyond the back wall 1-1/2" (38 mm). If installing this product against wall board, 1-1/2" (38 mm) furring strips installed over the wall board are recommended. The stud pocket depth of 40-5/8" (1032 mm) will need to be increased by the combined thickness of the wall board and furring strips.