

► Code Number

3873075

► Description

Vitreous china wall mounted lavatory

► Fixture Specification

- White Vitreous china
- Permanent SloanTec™ hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces
- Wall Mount
- Rear Overflow
- 4" (102 mm) Centerset
- Mounting bracket Included
- 21 1/2" x 20" (546 mm x 508 mm)
- Carrier Not Included
- Meets requirements for Texas Accessibility Standards (TAS)

► Optional Ceramic Shroud


- White vitreous china
- 7 3/4" x 10 1/2" x 9 3/4" (197 mm x 267 mm x 248 mm)
- Mounting hardware included
- Must be specified separately Model SS-27, code 387678

► Product Specification

Sink shall be made of vitreous china with SloanTec™ Hydrophobic Glaze. Sink shall be wall mounted. Sink shall have a rear overflow. Sink shall be 4" centerset. Sink shall be Sloan Model SS-3065-STG.

► Accessibility Rough-In Requirements

	ADA and TAS	Children's Environment	
		ADA 12 yrs & younger	TAS 6-12 yrs
A	34" (864 mm)	31" (787 mm)	
B	27" (686 mm)	24" (610 mm)	

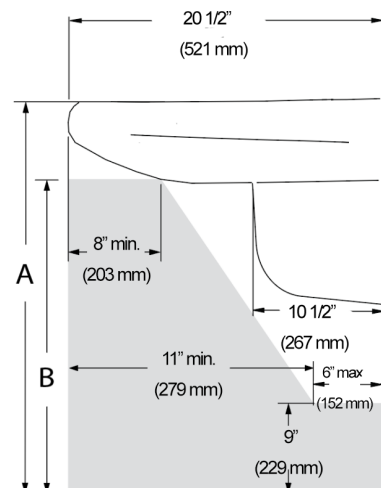

Shown with optional SS-27 shroud

► Notes

- All information contained in this document subject to change without written notice
- NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

► Compliance & Certifications



This space for Architect/Engineer Approval

The technical drawings illustrate the ADA 34 floor-mounted urinal from three perspectives: top, side, and front views. Dimensions are provided in inches and millimeters.

Top View: Shows the overall footprint of the urinal. The total width is 21.5 inches [546]. The distance between the centers of the two main supply holes is 4 inches [102]. The distance from the center of the main supply holes to the center of the drain is 4 inches [102]. The distance from the center of the main supply holes to the center of the shroud anchors is 6 inches [152]. The distance from the center of the main supply holes to the center of the drain is 3.875 inches [98]. The distance from the center of the main supply holes to the center of the shroud anchors is 6 inches [152]. The distance from the center of the main supply holes to the center of the drain is 3.875 inches [98].

Side View: Shows the profile of the urinal. The total height is 20.5 inches [521]. The distance from the top of the urinal to the center of the drain is 10.5 inches [267].

Front View: Shows the urinal mounted to a finished floor. The total height from the finished floor to the top of the urinal is 34 inches [864]. The distance from the finished floor to the center of the drain is 33.25 inches [845]. The distance from the finished floor to the center of the shroud anchors is 32.5 inches [826]. The distance from the center of the drain to the center of the shroud anchors is 8 inches [203]. The distance from the center of the drain to the center of the main supply holes is 4.75 inches [121]. The distance from the center of the drain to the center of the shroud anchors is 1.5 inches [38]. The distance from the center of the drain to the center of the shroud anchors is 3 inches [76]. The distance from the center of the drain to the center of the shroud anchors is 8.5 inches [216]. The distance from the center of the drain to the center of the shroud anchors is 11 inches [280]. The distance from the center of the drain to the center of the shroud anchors is 3 inches [76].

Labels: The drawings include labels for "SHROUD ANCHORS", "DRAIN", "SUPPLIES", and "FINISHED FLOOR".