

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

R1912AX / R1920AX Copper Faucet Supply Kit - Multi-Turn Sweat Angle Stop

Use: For use with water in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop supply kit.

Design Features:

- Everything you need.** These kits combine our trusted BrassCraft® supply stop, copper riser, and escutcheon for an easy-to-install connection

Copper Riser Provides:

- One-piece** construction
- Cut-to-length** for a clean, professional installation

Multi-Turn Stop Provides:

- Machined one-piece brass body** provides strength, durability, and long-lasting performance
- Oval knurled handle** provides a secure grip and smooth on/off operation
- Easy-to-remove handle** with screw attachment helps protect against accidental stop operation during rough-ins
- ✓ No Lead**

Operating Specifications:


Temperature: 40°- 140° F

Pressure: 125 PSI maximum

Tubing Diameter: 3/8" OD

No-Lead Product

STOP MATERIAL SPECIFICATIONS	
Body	No-Lead brass or No-Lead brass, chrome plated
Stem	Brass or brass, chrome plated
Bib & Packing Washer	Rubber
Packing Nut	Brass or brass, chrome plated
Handle	Zinc, die cast plated; ABS, plated; or Polycarbonate
Handle Screw	Zinc-plated steel
Compression Nut	Brass or brass, chrome plated
Compression Sleeve	Brass
Escutcheon	Stainless steel
Loose Key	Zinc, die cast
Loose Key Stem	Brass, chrome plated
Lock Shield	Brass, chrome plated

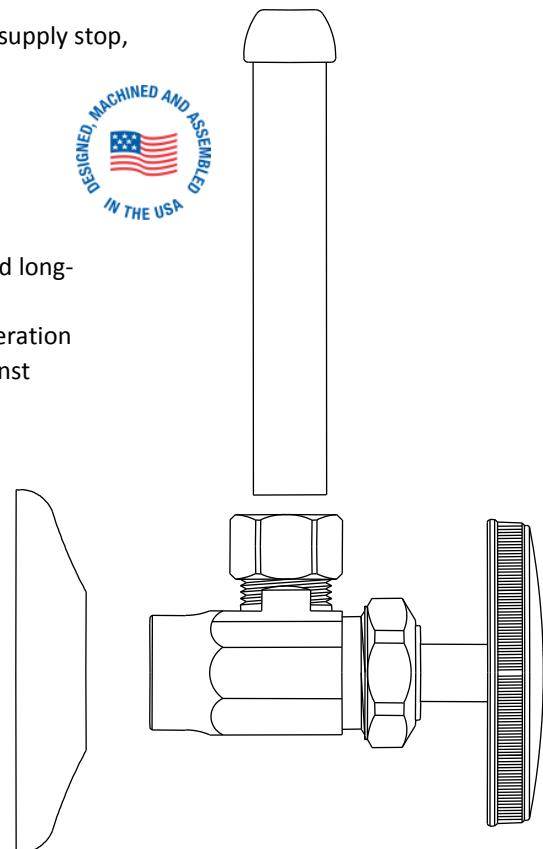

CONNECTOR MATERIAL SPECIFICATIONS	
Tube	Copper, chrome plated
Nosepiece Insert	Plastic

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.


BrassCraft®

R1912AX / R1920AX Copper Faucet Supply Kit - Multi-Turn Sweat Angle Stop

No-Lead Part Listing:

<input type="checkbox"/> R1912AX C	1/2" nom sweat x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, chrome plated
<input type="checkbox"/> R1912AX R	1/2" nom sweat x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, rough brass
<input type="checkbox"/> R1920AX C	1/2" nom sweat x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, chrome plated
<input type="checkbox"/> SR1912AX C	1/2" nom sweat x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, loose key, chrome plated

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIM. C
R1912AX	12.00	1.63	2.50
SR1912AX	12.00	1.45	2.29
R1920AX	20.00	1.63	2.50
SR1920AX	20.00	1.45	2.29

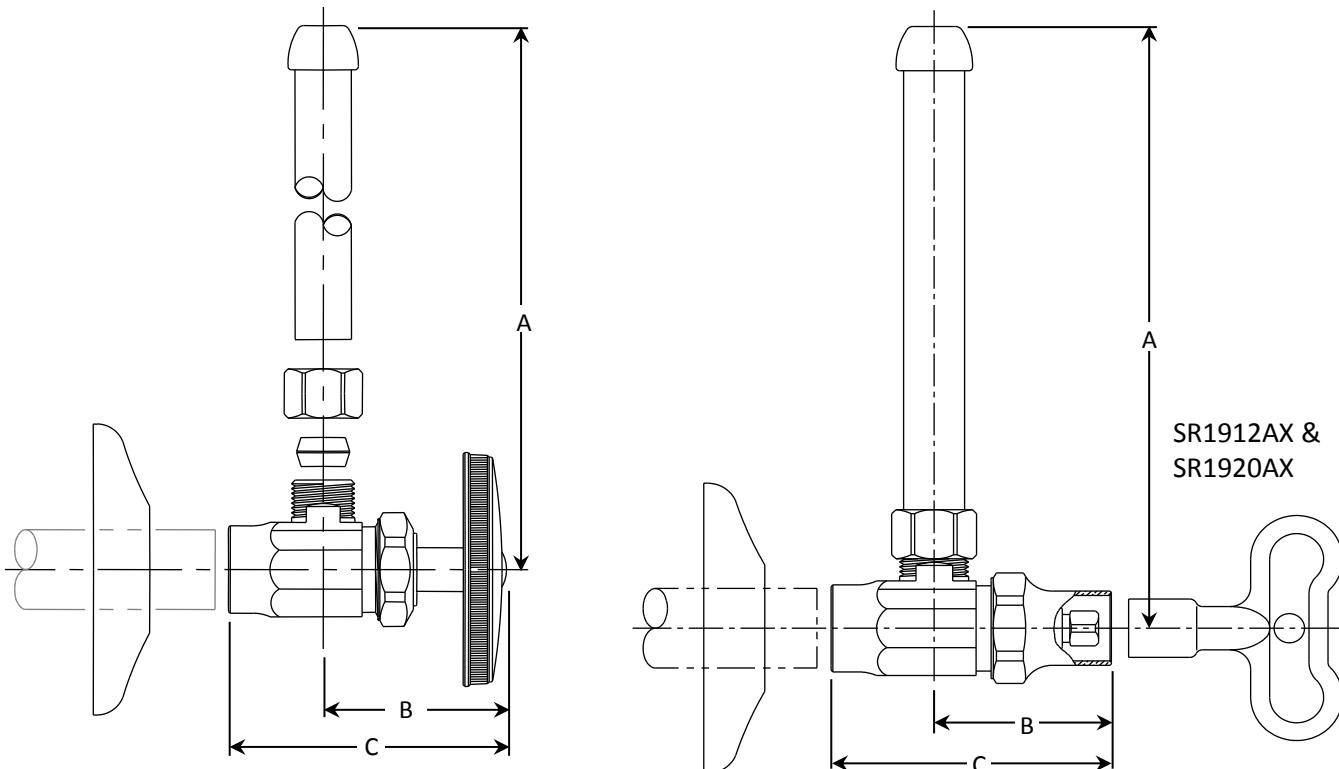

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- No-Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft®