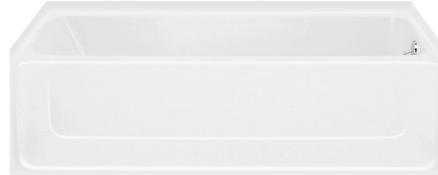


**Features**

- Durable swirl gloss finish.
- Backrest molded into bath.
- 15" (381 mm) bath depth (floor to top of threshold).
- 60" (1524 mm) x 30" (762 mm) x 15" (381 mm) finished dimensions.

**Material**

- Compression molded from our exclusive solid Vikrell® material.

**ADA****Codes/Standards**

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

Greenguard UL 2818 - Gold

ADA

ICC/ANSI A117.1


**STERLING® Warranty - Fixtures Made of Solid Vikrell Material**

See website for detailed warranty information.

**Available Color/Finishes***Color tiles intended for reference only.***Color    Code    Description**

0    White

96    KOHLER Biscuit

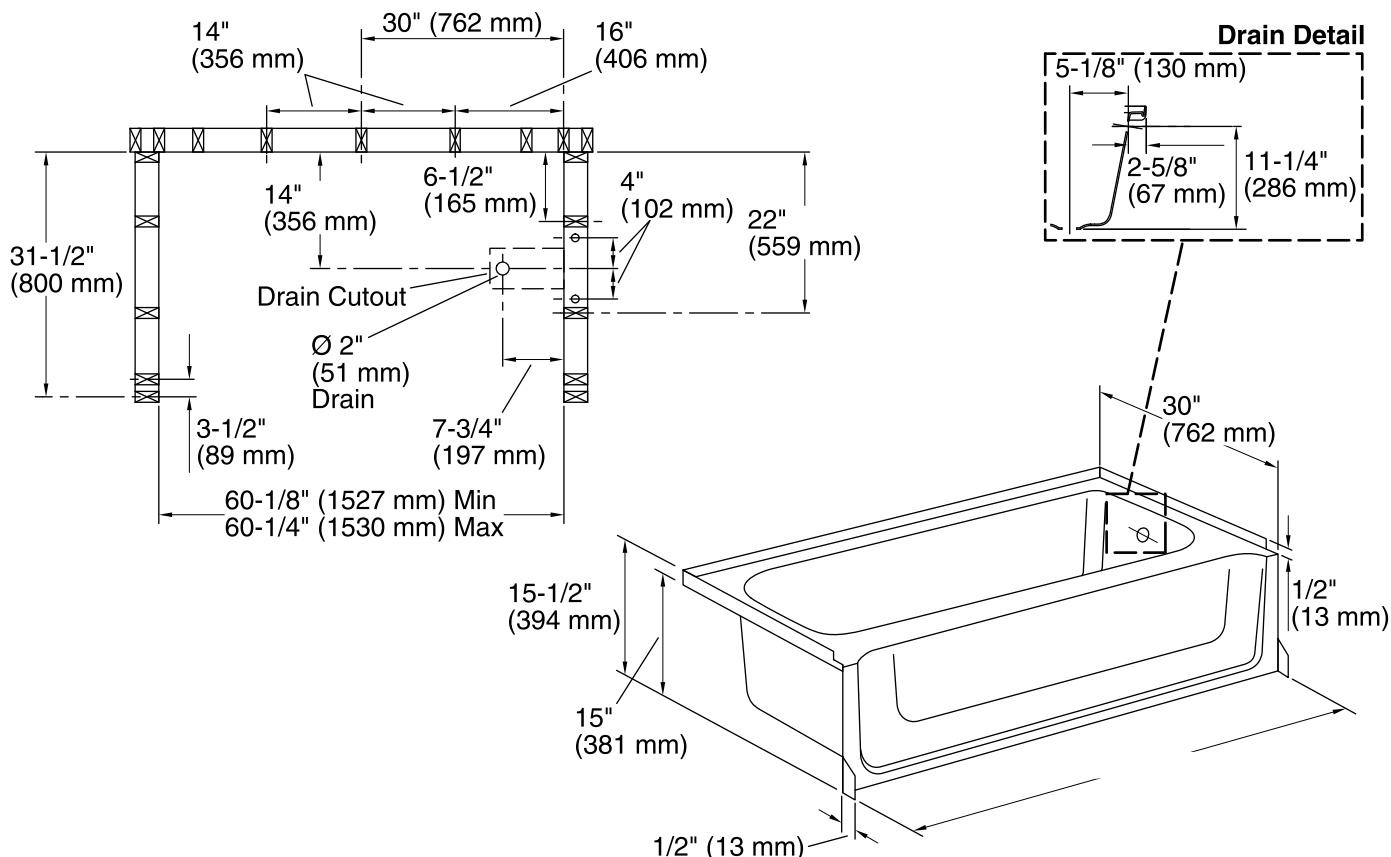

## Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Right

Basin area, bottom: 48" x 21" (1219 mm x 533 mm)

Basin area, top: 55" x 23" (1397 mm x 584 mm)

Weight: 51.835 lbs (23.5 kg)

Water depth: 9-3/8" (238 mm)

Water capacity: 44 gal (166.6 L)

Minimum flat for door: 2-1/4" (57 mm)

Door height required: 57" (1448 mm)

Door width required: 57-1/2" (1461 mm)

## Notes

Install this product according to the installation instructions.

Studs should be positioned roughly as shown.

Double studding is recommended for pivot shower door installations.

ADA compliant when installed to the specific requirements of these regulations.