

► Code Number

2102029

► Description

Vitreous china floor mounted ADA compliant water closet

► Flush Cycle

- 1.1 to 1.6 gpf/4.2 to 6.0 Lpf
- Flush volume is determined by the flushometer used with fixture

► Fixture Specification

- White Vitreous China
- Floor mounted, Floor outlet
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer
- 1 1/2" I.P.S. top spud inlet
- 2 1/8" fully glazed trapway diameter
- Integral flushing rim
- Elongated bowl
- Water spot area 10" x 7-1/2"
- Closet bolts and caps included
- Toilet seat not included

► Recommended Seats

- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT

► Plumbing System Requirements


- Minimum Flowing Pressure: 25 PSI
- Maximum Static Pressure: 80 PSI
- Minimum Flow Rate: 25 GPM

► Product Specification

- Elongated water closet shall be made of vitreous china with a 1 1/2" top spud. Bowl shall be ADA Compliant when installed at required height of 17" from floor to top of fixture. Water Closet shall be Sloan Model ST-2029.

► Notes

- All information contained in this document subject to change without written notice
- All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.
- This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).

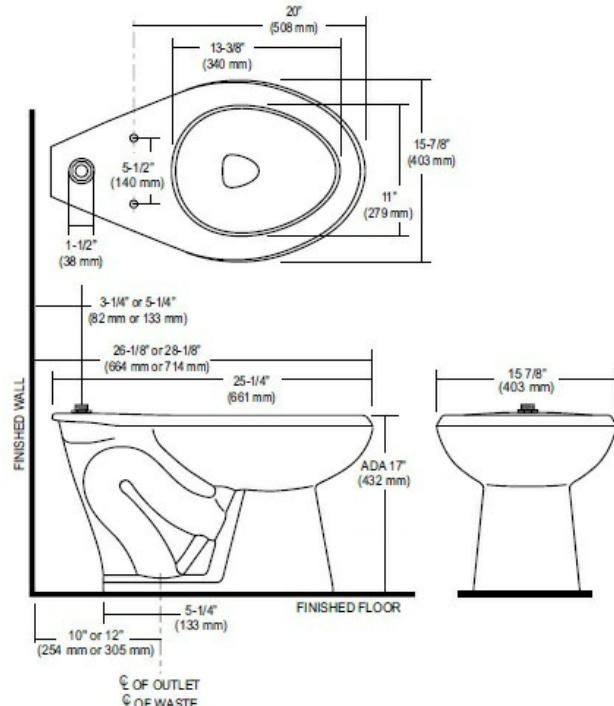

► Compliance & Certifications



CALGreen

This space for Architect/Engineer Approval