

Features

- Double (equal) rectangular bowls.
- No faucet holes; requires wall- or counter-mount faucet.
- Luster finish.
- Includes reveal and no-reveal option.
- Includes SilentShield® sound-absorption system.
- 11444 = single pack.
- J11444 = 3 per pack.
- T11444 = 20 per pack.
- F11444 = 40 per pack.
- Minimum base cabinet width: 33"-36" (33" cabinet may require cabinet modifications).
- 32" (813 mm) x 18" (457 mm) x 8-9/16" (217 mm)

**Material**

- 18-gauge stainless steel.

Installation

- Under-mount.

Recommended Accessories

- 7400 Duostrainer™ Sink Strainer
- 11861 Bottom Bowl Rack
- K-6139 Sponge Caddy

Components

Product includes:


- 91915 Hardware Kit

Codes/Standards


ASME A112.19.3/CSA B45.4

STERLING® Warranty - Stainless Steel Sinks


See website for detailed warranty information.

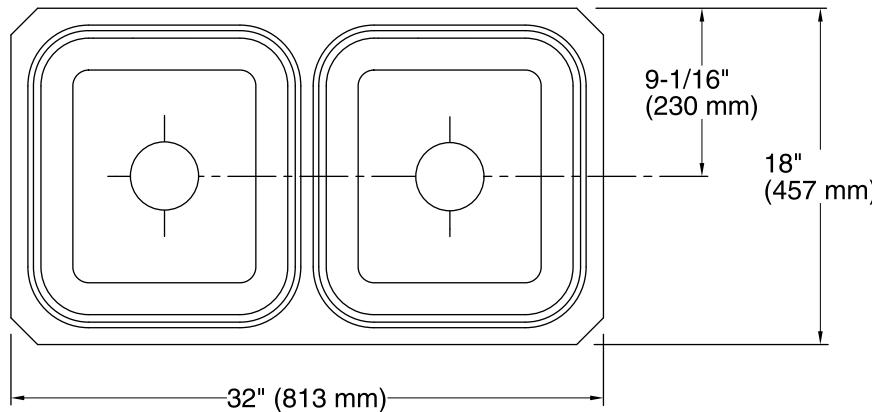


Mounting bracket assembly provides a secure installation.



Reveal



No Reveal

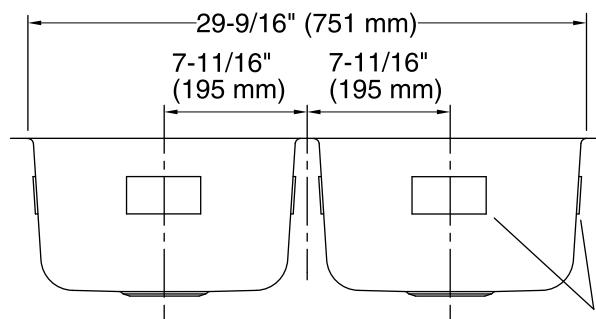

Silent Shield™ Sound Pads

Technical Information

All product dimensions are nominal.

Bowl configuration: Double equal

Installation: Under-mount

Min. base cabinet width: 36" (914 mm)

Bowl area (Left) Length: 14-1/16" (357 mm)
Width: 15-3/4" (400 mm)
Bowl depth: 8-9/16" (218 mm)
Water depth: 8-1/16" (205 mm)

Bowl area (Right) Length: 14-1/16" (357 mm)
Width: 15-3/4" (400 mm)
Bowl depth: 8-9/16" (218 mm)
Water depth: 8-9/16" (218 mm)

Drain hole: 3-5/8" (92 mm)
Template: 1041962-7, required, included

Notes

Install this product according to the installation instructions.

Measure your actual product for roughing-in details.

Use the supplied cut-out template to select either a hidden or exposed rim.

Minimum base cabinet width: 33"-36" (33" cabinet may require cabinet modifications). Consult an installer for confirmation before proceeding.