

MINI-SPLIT TRAY CABLE

600 VOLT

APPLICATIONS

Suitable for use as follows:


- Tray Cable is a multi-conductor control, signal or power cable rated for 600 volts
- May be installed in raceways, conduit, cable trays and outdoor locations where supported by a messenger wire
- Also suitable for direct burial
- Temperature rated at 75°C wet locations / 90°C dry locations

STANDARDS & REFERENCES

- UL listed as per UL 1277
- Conforms to applicable sections of UL 1581 and 1685
- RoHS Compliant
- Type TC

CONSTRUCTION

- Stranded copper conductors Type THHN or THWN
- The overall jacket is heat, moisture and sunlight resistant PVC

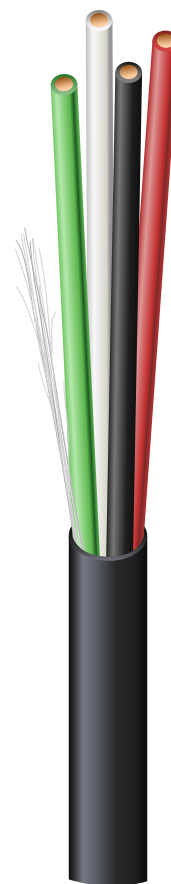

EZ-IN™ MINI-SPLIT CABLE 600 VOLT /
MINI-SPLIT TRAY CABLE 600 VOLT

WEIGHTS, MEASUREMENTS, AND PACKAGING

SIZE (AWG) / NUMBER OF CONDUCTORS	CONDUCTOR COLORS	JACKET THICKNESS NOM. (mils) / COLOR	APPROX. O.D. (mils)	APPROX. NET WT. (lbs/1000 ft)
14/4	Black, Red, Blue, Orange	45/Black	350	93
14/7	Black, Red, Blue, Orange, Yellow, Brown, Red with Black Stripe	45/Black	413	145

600 Volt

90°C Dry

75°C Wet

PVC Jacket



greenSpec®
RoHS Compliant
2002/95/EC



Southwire®