


## General Purpose Corrosion Control Tape

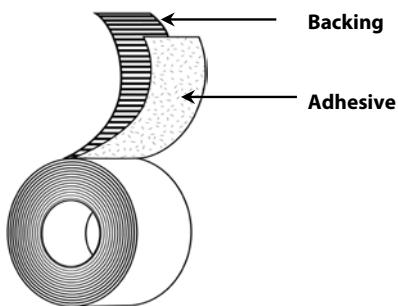

**Backing:** Polyethylene Film

**Adhesive:** Butyl Rubber

**Liner:** N/A

**Colors:** Black, Yellow

**Specifications:** N/A

**Standard Sizes:** 48mm x 31M, 4" x 100Ft, 6" x 100Ft

### Applications

- Interior and exterior pipe wrapping for corrosion and mechanical protection of small diameter pipe
- Suitable for use in below-grade applications when used in conjunction with a primer such as Polyken 1027 or 1039

### Features

- Polyethylene Film Backing
- Butyl Rubber Adhesive

### Benefits

- Conformable and flexible
- Excellent durability and solvent resistance
- Withstands outdoor exposure and moisture
- Aggressive bond to pipe surfaces
- Resists moisture and solvents
- Excellent dielectric strength
- Good performance over a wide temperature ran

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	12.0 mils	0.305 mm	ASTM D-1000
<b>Adhesion to Unprimed Steel</b>	40 oz/in	4.38 N/cm	PSTC-101
<b>Adhesion to Primed Steel</b>	100 oz/in	10.94 N/cm	PSTC-101
<b>Tensile Strength</b>	25 lb/in	43.78 N/cm	ASTM D-1000
<b>Application Temperature</b>	0 to 140 °F	-17 to 60 °C	
<b>Operating Temperature</b>	-30 to 140 °F	-34 to 60 °C	
<b>Elongation</b>	110%		

Recommended Storage Conditions: 32-90 °F at 50% RH ± 2%

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.